




## High Resolution P5 Indoor Full Color Led Advertising Board High Frequency Dynamic Image

Our Product Introduction

### Basic Information

- Place of Origin: China
- Brand Name: Vegoo
- Certification: CE/ROHS/FCC/
- Model Number: VG-FD 3
- Minimum Order Quantity: 1 Sq.m
- Packaging Details: Plywood case / Flight case / Carton box
- Delivery Time: 15 working days
- Supply Ability: 3000 Sq.m / month

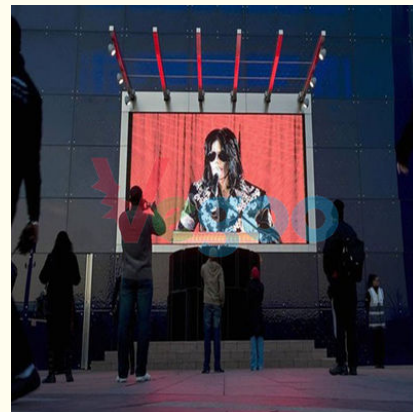

### Product Specification

- Product Name: P5 Indoor Full Color LED Display
- Certification: CE/ROHS/FCC
- Pixel Pitch: 5mm
- Pixel Configuration: 1R1G1B/SMD2121 Black Lamp
- Brightness: 600CD/
- Contrast: 1000:1
- Highlight: full color led display board, indoor advertising led display



for more products please visit us on [hdled-display.com](http://hdled-display.com)

## Product Description


### high frequency dynamic image P5 Indoor Full color LED Display Easy repair

#### Quick Detail:

1. High resolution and high frequency dynamic image
2. Long life span and stable work
3. Easy repair & maintenance
4. Reliable quality, really high cost-effective.

#### P5 Indoor Full color LED Display Specification:

NO:	Product Name	Specification
1	Pixel Pitch	5mm
2	Pixel Configuration	1R1G1B/SMD2121 Black lamp
3	Density	40,000 pixel/m2
4	Module Size(L×W)mm	320mm×160mm
5	Cabinet Size(L×W×H)mm	640mm×640mm×90mm
6	Module Resolution	64×32
7	Cabinet Resolution	128×128
8	Driving Method	1/16 Scan
9	Driving IC	MBI5124
10	Brightness	600CD/
11	Contrast	1000:1
12	Brightness Adjustment	Auto and Manual
13	Power Consumption	Max Power: 500W
14		Average power: 200W
15	Module Weight	0.45kg
16	Color Temperature	9500K—11500K
17	Horizontal Viewing Angle	140°
18	Vertical Viewing Angle	140°
19	Signal Processing	10 or 14bit
20	Grey Processing	1024×1024×1024 16834×16834×16834
21	Control Distance	cable100m,Multimode500m,Single mode 2km
22	Frame Frequency	65 Hz
23	Refresh Rate	>1920Hz
24	Control Mode	Synchronous/Asynchronous
25	The Opposite Calibration Curve	With Eight Optional Gamma Calibration Curve
26		Users can choose the recommended curve or adjust it based on actual situation
27	MTBF	>50000 hours
28	Life Span	100,000 Hours
29	Operating Temperature	Working : -20 - 65 °C
30		Storage : -40 - 85 °C
31	Environment Temperature	-30°C to 60°C; humidity Rh10% to 95%
32	Remote Control	Can realize remote control and send alarm signal to operators in case of logging failure (Be customized)
33	Self-checking Technique	Self-inspection, communication test, power test, temperature monitoring (Be customized)
34	Operating System Platform	WindowsNT,Windows2000,WindowsXP,Windows7
35	Power Supply	AC 110-220V
36	Protection	dustproof, high temperature pervention, anticorrosion, smoulderproof, anti-static, shockproof, lightningproof, smoke alarm and temperature alarm. (Be customized)

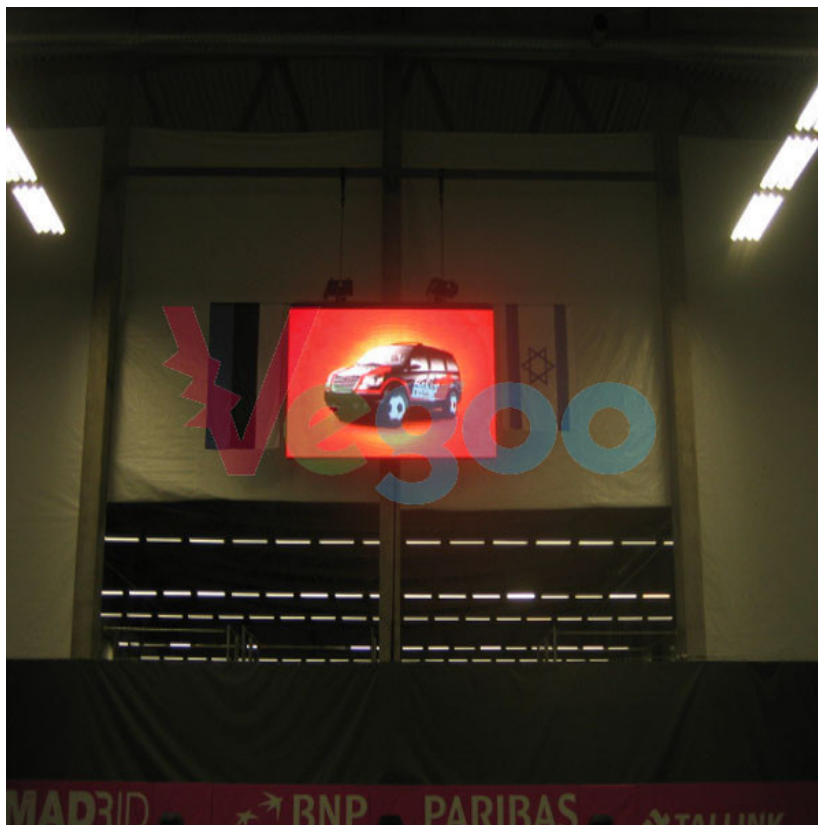

#### Quality Management

Implement 5 s site management, general SPC statistical process control methods

Through the ISO9001, CE, ROHS, FCC certification

Perfect quality, IQC, IPQC, OQC, LQC, QA engineering, QE engineering and supplier management

#### Upgrade Service :

Unschedule, we will upgrade our system of products without extra formal; we'll do our best to help users with upgrading ; the following conditions are excluded by this warranty :

Without approved documents;

Series code on products having been torn or changed ;

Damage caused by lighting strike or electrical problems;

Risks caused by irresistible incidents includes all kinds of natural disasters, fire, wars, policy changes, and some other human error accidents.

Users or third party refit or repaired by themselves without VEGOO's permission ;

Water intrusion or corrosion caused by improper keeping or operating ;

Over period of free maintenance .



**Shenzhen Weigu Electronic Technology Co., Ltd.**



86-15118043086



Linda@vegooled.com



hdled-display.com

806 Building 1 Geya Technology Building, Clock Base, Ma Tou community, Ma Tian Street, Guangming District ,  
Shenzhen, China