

## P6 Indoor Full Color LED Display P6 Led Sign With 140° Viewing Angle

Our Product Introduction

for more products please visit us on [hdled-display.com](http://hdled-display.com)


### Basic Information

- Place of Origin: China
- Brand Name: Vegoo
- Certification: CE/ROHS/FCC/
- Model Number: VG-FD 3
- Minimum Order Quantity: 1 Sq.m
- Packaging Details: Plywood case / Flight case / Carton box
- Delivery Time: 15 working days
- Supply Ability: 3000 Sq.m / month



### Product Specification

- Product Name: P6 Indoor Full Color LED Display
- Certification: CE/ROHS/FCC
- Pixel Pitch: 6mm
- Density: 27,777 Pixel/m<sup>2</sup>
- Brightness: 1100cd/
- Contrast: 1000:1
- Highlight: full color led display board,  
indoor full color led display screen

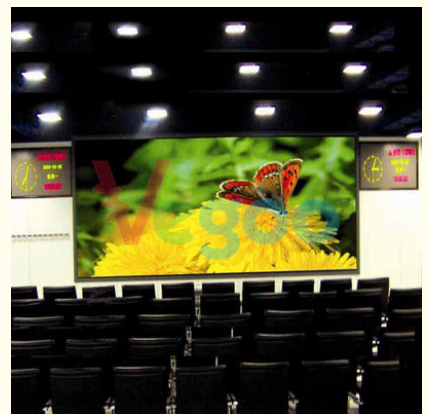

## Product Description

### P6 Indoor Full color LED Display Screen with 140° Viewing Angle


#### Quick Detail:

Indoor p6 LED Display Features:

1. Relatively low cost;
2. Stable capability;
3. Low energy consumption;
4. Good after-sale;

#### P6 Indoor Full color LED Display Specification:

NO:	Product Name	Specification
1	Pixel Pitch	6mm
2	Pixel Configuration	1R1G1B/SMD3528 White lamp
3	Density	27,777 pixel/m <sup>2</sup>
4	Module Size(L×W)mm	192mm×192mm
5	Cabinet Size(L×W×H)mm	576mm×576mm×90mm
6	Module Resolution	32×32
7	Cabinet Resolution	96×96
8	Driving Method	1/16 Scan
9	Driving IC	MBI5124
10	Brightness	1100cd/
11	Contrast	1000:1
12	Brightness Adjustment	Auto and Manual
13	Power Consumption	Max Power: 540W
14		Average power: 200W
15	Module Weight	0.244kg
16	Color Temperature	9500K—11500K
17	Horizontal Viewing Angle	140°
18	Vertical Viewing Angle	140°
19	Signal Processing	10 or 14bit
20	Grey Processing	1024×1024×1024 16834×16834×16834
21	Control Distance	cable100m,Multimode500m,Single mode 2km
22	Frame Frequency	65 Hz
23	Refresh Rate	>1920Hz
24	Control Mode	Synchronous/Asynchronous
25	The Opposite Calibration Curve	With Eight Optional Gamma Calibration Curve
26		Users can choose the recommended curve or adjust it based on actual situation
27	MTBF	>50000 hours
28	Life Span	100,000 Hours
29	Operating Temperature	Working : -20 - 65 °C
30		Storage : -40 - 85 °C
31	Environment Temperature	-30°C to 60°C; humidity Rh10% to 95%
32	Remote Control	Can realize remote control and send alarm signal to operators in case of logging failure (Be customized)
33	Self-checking Technique	Self-inspection, communication test, power test, temperature monitoring (Be customized)
34	Operating System Platform	WindowsNT,Windows2000,WindowsXP,Windows7
35	Power Supply	AC 85-264V
36	Protection	dustproof, high temperature pervention, anticorrosion, smoulderproof, anti-static, shockproof, lightningproof, smoke alarm and temperature alarm. (Be customized)

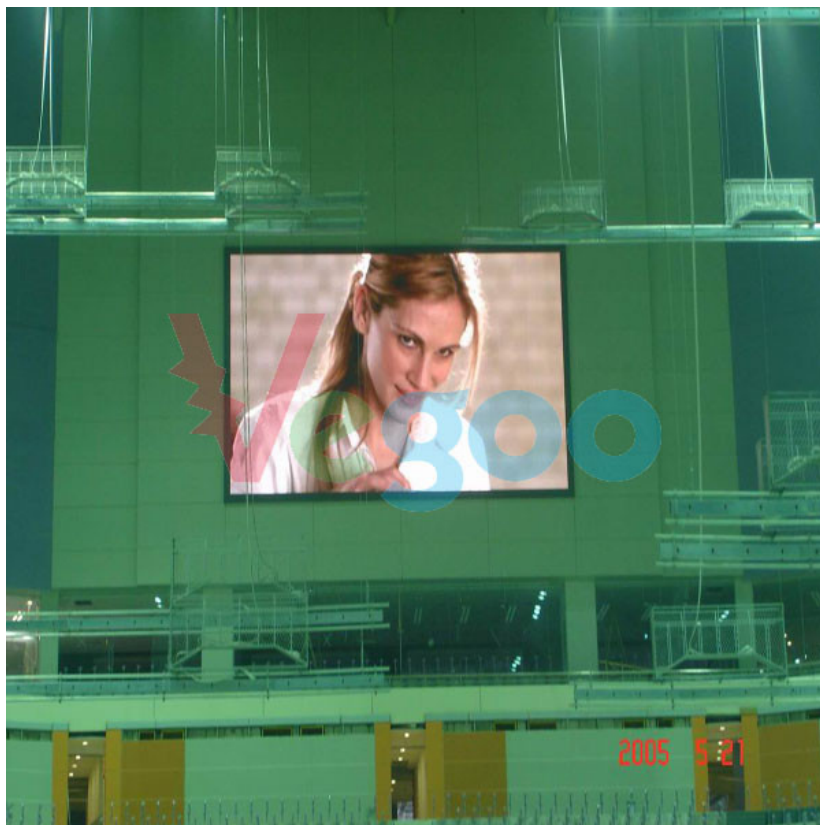

#### Our service

1. Your inquiry related to our products or price will be replied in 2hrs
2. OEM customized products
3. 2 years warranty
4. Complaint respond period not exceed 24 hours; maintenance guidance and problem solution supplied in 48 hours.
5. Free technician training..
6. Top quality+Reasonable price+Responsible After Service=Successful & Win

#### Competitive Advantages:

- 1) Stable quality and fast Response;
- 2) Short delivery, effective production;
- 3) Sample order, trial order be acceptable;
- 4) Good communication;
- 5) 2 years warranty;



**Shenzhen Weigu Electronic Technology Co., Ltd.**



86-15118043086



Linda@vegooled.com



hdled-display.com

806 Building 1 Geya Technology Building, Clock Base, Ma Tou community, Ma Tian Street, Guangming District ,  
Shenzhen, China