

## High Resolution Thin P3 Indoor Full Color LED Display For Shopping Malls

Our Product Introduction


### Basic Information

- Place of Origin: China
- Brand Name: Vegoo
- Certification: CE/ROHS/FCC/
- Model Number: VG-FD 3
- Minimum Order Quantity: 1 Sq.m
- Packaging Details: Plywood case / Flight case / Carton box
- Delivery Time: 15 working days
- Supply Ability: 3000 Sq.m / month



### Product Specification

- Product Name: P3 Indoor Full Color LED Display
- Certification: CE/ROHS/FCC
- Pixel Pitch: 3mm
- Pixel Configuration: 1R1G1B/SMD2121 Black Lamp
- Brightness: 800cd/
- Contrast: 1000:1
- Highlight: indoor advertising led display,  
indoor full color led display screen

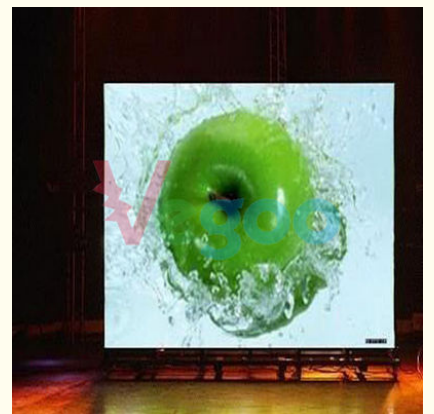

for more products please visit us on [hdled-display.com](http://hdled-display.com)

## Product Description

### High resolution P3 Indoor Full color LED Display for Shopping Malls

#### Quick Detail:

1. Super lighter and thinner;
  2. Easy connection and disassembling;
  3. Wide application, good for rental or fixed installation;
  4. High resolution and high frequency dynamic image.
- Video Led indoor P4 full color display/SMD full color led display

#### Applications:

Shopping Malls  
Music Venues and Concerts  
Large Offices  
Theater and Arts  
TV Shows  
Car Shows

### P3 Indoor Full color LED Display Specification

Product Name	Specification
Pixel Pitch	3mm
Pixel Configuration	1R1G1B/SMD2121 Black lamp
Density	111,111pixel/m <sup>2</sup>
Module Size(L×W)mm	192mm×192mm
Cabinet Size(L×W×H)mm	576mm×576mm×90mm
Module Resolution	64×64
Cabinet Resolution	192×192
Driving Method	1/32 Scan
Driving IC	MBI5124 or ICN 2038S
Brightness	800cd/
Contrast	1000:1
Brightness Adjustment	Auto and Manual
Power Consumption	Max Power: 800W
	Average power: 200W
Module Weight	0.25kg
Color Temperature	9500K—11500K
Horizontal Viewing Angle	140°
Vertical Viewing Angle	140°
Signal Processing	10 or 14bit
Grey Processing	1024×1024×1024 16834×16834×16834
Control Distance	cable100m,Multimode500m,Single mode 2km
Frame Frequency	65 Hz
Refresh Rate	>1920Hz
Control Mode	Synchronous/Asynchronous
The Opposite Calibration Curve	With Eight Optional Gamma Calibration Curve
	Users can choose the recommended curve or adjust it based on actual situation
MTBF	>50000 hours
Life Span	100,000 Hours
Operating Temperature	Working : -20 - 65 °C
	Storage : -40 - 85 °C
Environment Temperature	-30°C to 60°C; humidity Rh10% to 95%
Remote Control	Can realize remote control and send alarm signal to operators in case of logging failure (Be customized)
Self-checking Technique	Self-inspection, communication test, power test, temperature monitoring (Be customized)

Operating System Platform	WindowsNT,Windows2000,WindowsXP,Windows7
Power Supply	AC 110-220V
Protection	dustproof, high temperature pervention, anticorrosion, smoulderproof, anti-static, shockproof, lightningproof, smoke alarm and temperature alarm. (Be customized)

#### Our service

1. Your inquiry related to our products or price will be replied in 2hrs
2. OEM customized products
3. 2 years warranty
4. Complaint respond period not exceed 24 hours; maintenance guidance and problem solution supplied in 48 hours.
- 5.Free technician training..
- 6.Top quality+Reasonable price+Responsible After Service=Successful & Win



**Shenzhen Weigu Electronic Technology Co., Ltd.**



86-15118043086



Linda@vegooled.com



hdled-display.com

806 Building 1 Geya Technology Building, Clock Base, Ma Tou community, Ma Tian Street, Guangming District ,  
Shenzhen, China