




Anti corrosion Smoulderproof P10 Indoor Led Display Board Hd Led Screen 10000 Pixel/M2

Our Product Introduction

Basic Information

- Place of Origin: China
- Brand Name: Vegoo
- Certification: CE/ROHS/FCC/
- Model Number: VG-FD 3
- Minimum Order Quantity: 1 Sq.m
- Packaging Details: Plywood case / Flight case / Carton box
- Delivery Time: 15 working days
- Supply Ability: 3000 Sq.m / month

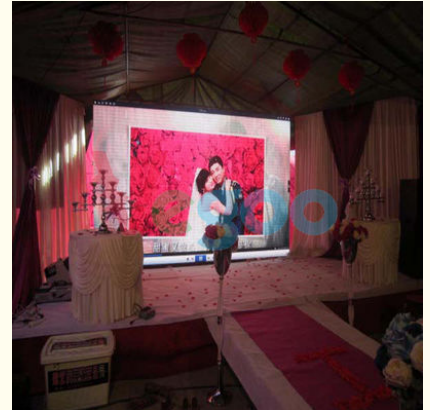

Product Specification

- Product Name: P10 Indoor Full Color LED Display
- Certification: CE/ROHS/FCC
- Pixel Pitch: 10mm
- Moduel Size(L×W)mm: 320mm×160mm
- Brightness: 1000cd/
- Contrast: 1000:1
- Highlight: indoor advertising led display,
indoor full color led display screen



for more products please visit us on hdled-display.com

Product Description

anticorrosion smoulderproof P10 Indoor Full color LED Display

Description:

Red, Green and Blue light emitting diode (LED) lamps should be the same grade, height and wavelength on the same display. The height of Red, Green and Blue light from light emitting diode (LED) lamps at the proportion of R:G:B=3:6:1. The chips were imported from Optotech Cree/ Nichia are adopted; Adopted automation solid crystal, light split, bonding wire, bagging;

Protection

dustproof, high temperature prevention, anticorrosion, smoulderproof, anti-static, shockproof, lightningproof, smoke alarm and temperature alarm. (Be customized)


Applications:

Stage Background
Airport & Station
Television Relay
Information Display
Stadium
Event Show

P10 Indoor Full color LED Display Specification:

NO:	Product Name	Specification
1	Pixel Pitch	10mm
2	Pixel Configuration	1R1G1B/SMD3528 White lamp
3	Density	10,000 pixel/m ²
4	Module Size(L×W)mm	320mm×160mm
5	Cabinet Size(L×W×H)mm	640mm×640mm×90mm
6	Module Resolution	32×16
7	Cabinet Resolution	64×64
8	Driving Method	1/8 Scan
9	Driving IC	DP5020
10	Brightness	1000cd/
11	Contrast	1000:1
12	Brightness Adjustment	Auto and Manual
13	Power Consumption	Max Power: 300W
14		Average power: 120W
15	Module Weight	0.45kg
16	Color Temperature	9500K—11500K
17	Horizontal Viewing Angle	140°
18	Vertical Viewing Angle	140°
19	Signal Processing	10 or 14bit
20	Grey Processing	1024×1024×1024 16834×16834×16834
21	Control Distance	cable100m, Multimode500m, Single mode 2km
22	Frame Frequency	65 Hz
23	Refresh Rate	>1200Hz
24	Control Mode	Synchronous/Asynchronous
25	The Opposite Calibration Curve	With Eight Optional Gamma Calibration Curve
26		Users can choose the recommended curve or adjust it based on actual situation
27	MTBF	>50000 hours
28	Life Span	100,000 Hours
29	Operating Temperature	Working : -20 - 65 °C
30		Storage : -40 - 85 °C
31	Environment Temperature	-30°C to 60°C; humidity Rh10% to 95%

32	Remote Control	Can realize remote control and send alarm signal to operators in case of logging failure (Be customized)
33	Self-checking Technique	Self-inspection, communication test, power test, temperature monitoring (Be customized)
34	Operating System Platform	WindowsNT,Windows2000,WindowsXP,Windows7
35	Power Supply	AC 110-220V

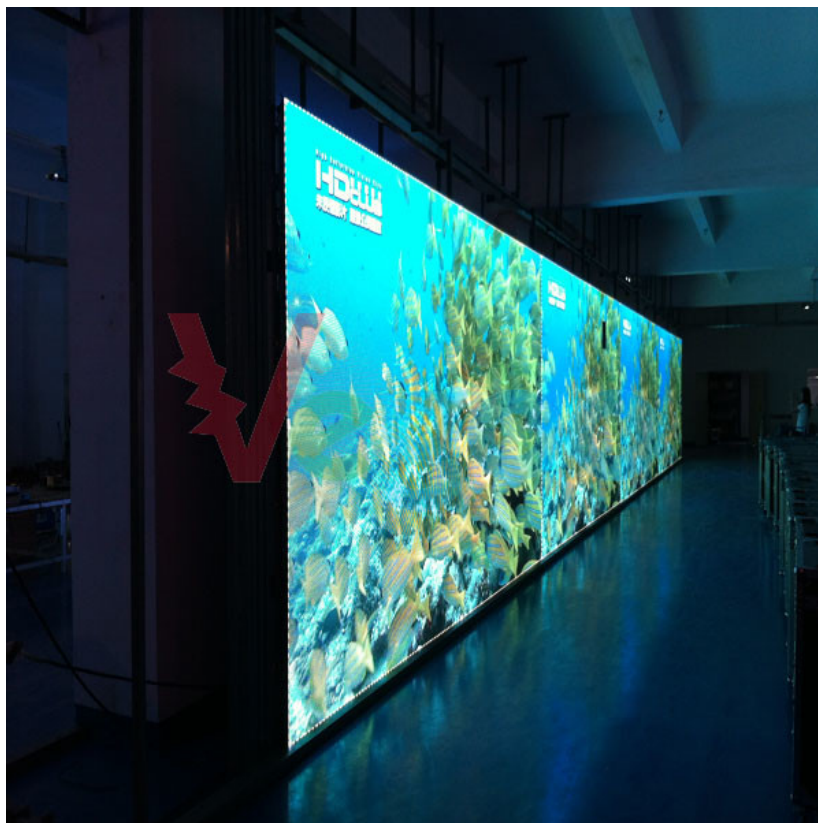

Services Before-sale:

Set a special telephone line to resolve the confusion from clients and supply free technology services by telephone.

Consider the demands of clients carefully , study the situation of the installation condition , Team up the related staff and workers promptly , give clients design program details to help them choose the products which they wanted as soon as possible

Service In - sales :

Try the best to meet the reasonable demands by clients Provisional changed .
Keep close touch with the clients during the period if installation .
Cooperate friendly with the clients, satisfy the clients with the best quality of led display .

Service After-sale:

Normal products have one year guarantee, and whole life maintenance, free charges . we just charge materials cost only if products out off guarantee.
You can down load and upgrade the related operating software of Led display freely from our company website , so as to resolve the problems when you use our led display .
Check the quality of appliance , do maintenance job and ask good suggestions form clients on a regular time schedule .



Shenzhen Weigu Electronic Technology Co., Ltd.



86-15118043086



Linda@vegooled.com



hdled-display.com

806 Building 1 Geya Technology Building, Clock Base, Ma Tou community, Ma Tian Street, Guangming District ,
Shenzhen, China