Rental Indoor Ball LED Display P4 HD Full Color Led Sphere Display For Event
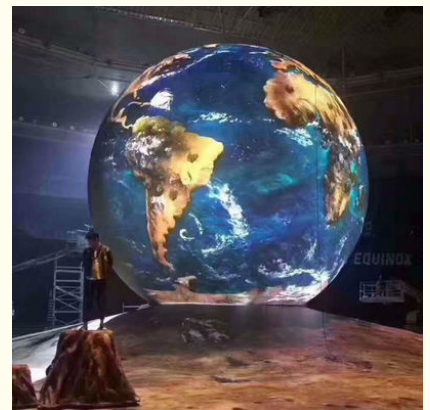
Basic Information

- Place of Origin: China
- Brand Name: Vegoo
- Certification: CE/ROHS/FCC/
- Model Number: VG-SD P4
- Minimum Order Quantity: 1 Sq.m
- Packaging Details: Plywood case / Flight case / Carton box
- Delivery Time: 35-60 working days

Product Specification

- Product Name: Ball LED Display
- Pixel Pitch: 4mm
- Pixel Configuration: 1R1G1B/SMD2121 Black Lamp
- Moduel Size(L×W)mm: 256mm×128mm
- Module Resolution: 64×32
- Contrast: 1000:1
- Color Temperature: 9500K—11500K
- Horizontal Viewing Angle: 140º
- Highlight: **led ball screen**, **led video ball**

Product Description

Indoor Led Video Wall Rental P4 HD Full Color Led Sphere Display For Event

Description:

1. CE,RoHS
2. Reasonable Price
3. Long lifespan
4, Fast installation
5, Flight case packaged

Applications:

This kind of LED 1R1G1B full color led display is applied for displaying advertising, city beautifying, information publicity, great concerns and relative activities.

P4 Indoor Full color LED Display Specification:

Product Name	Specification
Pixel Pitch	4mm
Pixel Configuration	1R1G1B/SMD2121 Black lamp
Density	62,500 pixel/m2
Moduel Size(L×W)mm	256mm×128mm
Cabinet Size(L×W×H)mm	512mm×512mm×90mm
Module Resolution	64×32
Cabinet Resolution	128×128
Driving Method	1/16 Scan
Driving IC	MBI5124 or ICN 2038S
Brightness	1000cd/
Contrast	1000:1
Brightness Adjustment	Auto and Manual
Power Consumption	Max Power: 610W
	Average power: 240W
Module Weight	0.2kg
Color Temperature	9500K—11500K
Horizontal Viewing Angle	140º
Vertical Viewing Angle	140º
Signal Processing	10 or 14bit
Grey Processing	1024×1024×1024 16834×16834×16834
Control Distance	cable100m,Multimode500m,Single mode 2km
Frame Frequency	65 Hz
Refresh Rate	>1920Hz
Control Mode	Synchronous/Asynchronous
The Opposite Calibration Curve	With Eight Optional Gamma Calibration Curve
	Users can choose the recommended curve or adjust it based on actual situation
MTBF	>50000 hours
Life Span	100,000 Hours
Operating Temperature	Working : -20 - 65 ℃
	Storage : -40 - 85 ℃
Environment Temperature	-30℃ to 60℃; humidity Rh10% to 95%
Self-checking Technique	Self-inspection, communication test, power test, temperature monitoring (Be customized)
Operating System Platform	WindowsNT,Windows2000,WindowsXP,Windows7
Power Supply	AC 110–220V

Customer Service

1) Guarantee Time: Within one year after delivery form factory
2) Maintenance Coverage : LED modules,Power supply ,Control system and other accessories (This warranty exclude accessories purchasing form other factory)
3) Maintenance Mode :
By returned maintenance , through express or by other way
4) Response time for maintenance :

1. Return mode: after receiving the returned products, we will repaired them within 24 hours and send them back to the user;

2. Telephone or internet mode: we will contact user within 2 hours after getting informations and give solution within 8 hours;

3. On-site mode: (only for user inside china) after receiving maintenance request , we will respond within 48 hours to user in Guangdong province; 72 hours to user outside Guangdong province, In the case of some special conditions , problems could be solved on the basis of friendly negotiation between two parties.