


## 4mm Led Videowall Led Display Board For Advertising With CE Certification

Our Product Introduction

for more products please visit us on [hdled-display.com](http://hdled-display.com)

### Basic Information

- Place of Origin: China
- Brand Name: Vegoo
- Certification: CE/ROHS/FCC/
- Model Number: VG-SD P4
- Minimum Order Quantity: 1 Sq.m
- Packaging Details: Plywood case / Flight case / Carton box
- Delivery Time: 35-60 working days

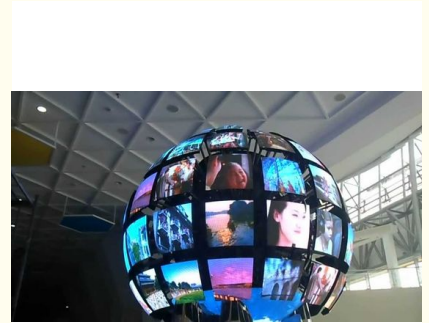

### Product Specification

- Product Name: Ball LED Display
- Pixel Pitch: 4mm
- Density: 62,500 Pixel/m<sup>2</sup>
- Cabinet Size(L×W×H)mm: 512mm×512mm×90mm
- Cabinet Resolution: 128×128
- Brightness: 1000cd/
- Contrast: 1000:1
- Color Temperature: 9500K—11500K
- Horizontal Viewing Angle: 140°
- Highlight: led video ball, led display ball



## Product Description

### 1R1G1B/SMD2121 Black lamp Full Color SMD LED Video Wall CE Certification

#### Description:

- CE Certification of our led display signs;
- Rohs Certificates;
- Excellent, Technical Innovation;
- Price performance ratio;
- Contract Performance and Credibility;
- LED Displays with high brightness LED's;
- Modular LED display screens;
- Our LED Display Screens have two years warranty ;
- Post sale assistance (after sale);
- High expertise and know-how about LED display products;

#### P4 Indoor Full color LED Display Specification:

Product Name	Specification
Pixel Pitch	4mm
Pixel Configuration	1R1G1B/SMD2121 Black lamp
Density	62,500 pixel/m <sup>2</sup>
Module Size(L×W)mm	256mm×128mm
Cabinet Size(L×W×H)mm	512mm×512mm×90mm
Module Resolution	64×32
Cabinet Resolution	128×128
Driving Method	1/16 Scan
Driving IC	MBI5124 or ICN 2038S
Brightness	1000cd/
Contrast	1000:1
Brightness Adjustment	Auto and Manual
Power Consumption	Max Power: 610W
	Average power: 240W
Module Weight	0.2kg
Color Temperature	9500K—11500K
Horizontal Viewing Angle	140°
Vertical Viewing Angle	140°
Signal Processing	10 or 14bit
Grey Processing	1024×1024×1024 16834×16834×16834
Control Distance	cable100m,Multimode500m,Single mode 2km
Frame Frequency	65 Hz
Refresh Rate	>1920Hz
Control Mode	Synchronous/Asynchronous
The Opposite Calibration Curve	With Eight Optional Gamma Calibration Curve
	Users can choose the recommended curve or adjust it based on actual situation
MTBF	>50000 hours
Life Span	100,000 Hours
Operating Temperature	Working : -20 - 65 °C
	Storage : -40 - 85 °C
Environment Temperature	-30°C to 60°C; humidity Rh10% to 95%
Operating System Platform	WindowsNT,Windows2000,WindowsXP,Windows7
Power Supply	AC 110–220V

#### Applications:

Stage Background  
Airport Station  
Television Relay

**Products exchanged or returned :**

we supply our products strictly according to the contract list , if the quantity or specification doesn't meet our contract list, the buyer can give objections within 3 days after received the products , we'll exchanged after company confirmed.

**Casual damage situation:**

We can provide corresponding fittings without extra fee when improper operation or unexpected artificial damaged arise .

**Over Guarantee time :**

You only have to pay maintenance cost such as labor costs , spare parts costs and round-trip costs !



**Vegoo** 威固电子 **Shenzhen Weigu Electronic Technology Co., Ltd.**

☎ 86-15118043086

✉ [Linda@vegooled.com](mailto:Linda@vegooled.com)

🌐 [hdled-display.com](http://hdled-display.com)

806 Building 1 Geya Technology Building, Clock Base, Ma Tou community, Ma Tian Street, Guangming District ,  
Shenzhen, China