

P5 Outdoor Full color LED Display


Basic Information

- Place of Origin: China
- Brand Name: Vegoo
- Certification: CE/ROHS/FCC/
- Model Number: VG-FD P10
- Packaging Details: Plywood case / Flight case / Carton box
- Delivery Time: 3-5 days
- Supply Ability: 3000Sq.m



Product Specification

- Product Name: P5 Outdoor Full Color LED Display
- Pixel Pitch: 5mm
- Pixel Configuration: 1R1G1B/SMD2727
- Density: 40,000 Pixel/m²
- Moduel Size(L×W)mm: 320mm×160mm
- Cabinet Size(L×W×H)mm: 960mm×960mm×130mm
- Driving Method: 1/8 Scan
- Driving IC: MBI5124 Or ICN 2038S
- Brightness: 6000cd/
- Contrast: 1000:1
- Highlight: outdoor digital signage displays,
outdoor full color led screen

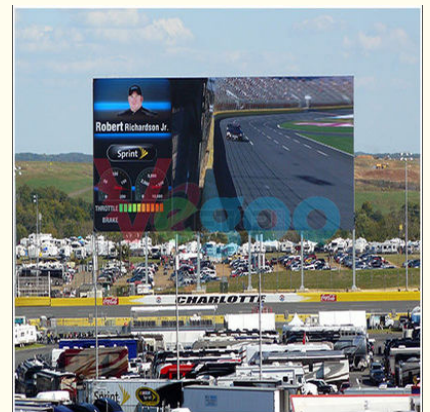

Product Description



Description:

1. High efficiency design overcomes harsh weather conditions.
2. Ultimate reliability
3. Lowest weight in its class
4. Minimum installation costs
5. Fiber-optic data transmission to the display
6. Image feeds delivered in both standard and high-definition formats.
7. Fan less operation ensures quiet, yet powerful performance.
8. Engineered for ease of service with top, back and front access. Easy top, back and front service access.
9. Lighter and thinner than typical fascia displays, reducing installation expenses and improves aesthetics.
10. Flexible, lightweight products that come with the best value at the most attractive prices.
11. Integrates seamlessly with a variety of Our Company's other video screen display products. Cost-effective LED displays that offer excellent black levels, contrast and image quality.

P5 Outdoor Full color LED Display Specification

NO:	Product Name	Specification
1	Pixel Pitch	5mm
2	Pixel Configuration	1R1G1B/SMD2727
3	Density	40,000 pixel/m2
4	Module Size(L×W)mm	320mm×160mm
5	Cabinet Size(L×W×H)mm	960mm×960mm×130mm
6	Module Resolution	64×32
7	Cabinet Resolution	192×192
8	Driving Method	1/8 Scan
9	Driving IC	MBI5124 or ICN 2038S
10	Brightness	6000cd/
11	Contrast	1000:1
12	Brightness Adjustment	Auto and Manual
13	Power Consumption	Max Power: 750W
14		Average power: 225W
15	Module Weight	0.28kg
16	Color Temperature	9500K—11500K
17	Horizontal Viewing Angle	140°
18	Vertical Viewing Angle	140°

19	Signal Processing	10 or 14bit
20	Grey Processing	1024×1024×1024 16834×16834×16834
21	Control Distance	cable100m,Multimode500m,Single mode 2km
22	Frame Frequency	65 Hz
23	Refresh Rate	>1920Hz
24	Control Mode	Synchronous/Asynchronous
25	The Opposite Calibration Curve	With Eight Optional Gamma Calibration Curve
26		Users can choose the recommended curve or adjust it based on actual situation
27	MTBF	>50000 hours
28	Life Span	100,000 Hours
29	Operating Temperature	Working : -20 - 65 °C
30		Storage : -40 - 85 °C
31	Environment Temperature	-30°C to 60°C; humidity Rh10% to 95%
32	Remote Control	Can realize remote control and send alarm signal to operators in case of logging failure (Be customized)
33	Self-checking Technique	Self-inspection, communication test, power test, temperature monitoring (Be customized)
34	Operating System Platform	WindowsNT,Windows2000,WindowsXP,Windows7
35	Power Supply	AC 85-264V
36	Protection	waterproof, dustproof, high temperature pervention, anticorrosion, smoulderproof, anti-static, shockproof, lightningproof, smoke alarm and temperature alarm. (Be customized)

Services Before-sale:

Set a special telephone line to resolve the confusion from clients and supply free technology services by telephone.

Consider the demands of clients carefully , study the situation of the installation condition , Team up the related staff and workers promptly , give clients design program details to help them choose the products which they wanted as soon as possible

Service In - sales :

Try the best to meet the reasonable demands by clients Provisional changed .

Keep close touch with the clients during the period if installation .

Cooperate friendly with the clients, satisfy the clients with the best quality of led display .

Service After-sale:

Normal products have one year guarantee, and whole life maintenance, free charges . we just charge materials cost only if products out off guarantee.

You can down load and upgrade the related operating software of Led display freely from our company website , so as to resolve the problems when you use our led display .

Check the quality of appliance , do maintenance job and ask good suggestions form clients on a regular time schedule .



Shenzhen Weigu Electronic Technology Co., Ltd.



86-15118043086



Linda@vegooled.com



hdled-display.com

806 Building 1 Geya Technology Building, Clock Base, Ma Tou community, Ma Tian Street, Guangming District ,
Shenzhen, China