

## P4.81 Indoor Full Color Led Panel Module Die - Casting Aluminium 250mm×250mm

Our Product Introduction

for more products please visit us on [hdled-display.com](http://hdled-display.com)

### Basic Information

- Place of Origin: China
- Brand Name: Vegoo
- Certification: CE/ROHS/FCC/
- Model Number: VG-RD 6
- Minimum Order Quantity: 1 sq.m
- Packaging Details: Flight case
- Delivery Time: 10-15 days
- Supply Ability: 3000sq.m/month



### Product Specification

- Product Name: P4.81 Indoor Full Color LED Display
- Pixel Pitch: 4.81mm
- Density: 43,243 Pixel/m<sup>2</sup>
- Module Size(L×W)mm: 250mm×250mm
- Brightness: 1100cd/
- Contrast: 1000:1
- Highlight: stage rental led display,  
outdoor rental led display




**Description**

1. Cabinets are made of die-casting aluminium, can be spliced with no crack.
2. P2.5/P3/P3.91/P4//P4.81/P5/P6/p6.25 is optional for you.
3. SMD 3-in-1 technology with high brightness makes the display have a ultra-wide view & vivid image.
4. Work normally without air conditioning for low power consumption.
5. Suitable for indoor stage background, event activity, meeting room, club, bar etc.

**P4.81 Indoor Full color LED Display Specification**

Product Name	Specification
Pixel Pitch	4.81mm
Pixel Configuration	1R1G1B/SMD2121 Black lamp
Density	43,243 pixel/m <sup>2</sup>
Module Size(L×W)mm	250mm×250mm
Cabinet Size(L×W×H)mm	500mm×500mm×90mm
Module Resolution	52×52
Cabinet Resolution	104×104
Driving Method	1/13 Scan
Driving IC	MBI5124
Brightness	1100cd/
Contrast	1000:1
Brightness Adjustment	Auto and Manual
Power Consumption	Max Power: 420W
	Average power: 240W
Module Weight	0.52kg
Color Temperature	9500K—11500K
Horizontal Viewing Angle	140°
Vertical Viewing Angle	140°
Signal Processing	10 or 14bit
Grey Processing	1024×1024×1024
	16834×16834×16834
Control Distance	cable100m, Multimode500m, Single mode 2km
Frame Frequency	65 Hz
Refresh Rate	>1920Hz
Control Mode	Synchronous/Asynchronous
The Opposite Calibration Curve	With Eight Optional Gamma Calibration Curve
	Users can choose the recommended curve or adjust it based on actual situation
MTBF	>50000 hours
Life Span	100,000 Hours
Operating Temperature	Working : -20 - 65 °C
	Storage : -40 - 85 °C
Environment Temperature	-30°C to 60°C; humidity Rh10% to 95%
Remote Control	Can realize remote control and send alarm signal to operators in case of logging failure (Be customized)
Self-checking Technique	Self-inspection, communication test, power test, temperature monitoring (Be customized)
Operating System Platform	WindowsNT, Windows2000, WindowsXP, Windows7
Power Supply	AC 110-220V

Protection	dustproof, high temperature pervention, anticorrosion, smoulderproof, anti-static, shockproof, lightningproof, smoke alarm and temperature alarm. (Be customized)
------------	---

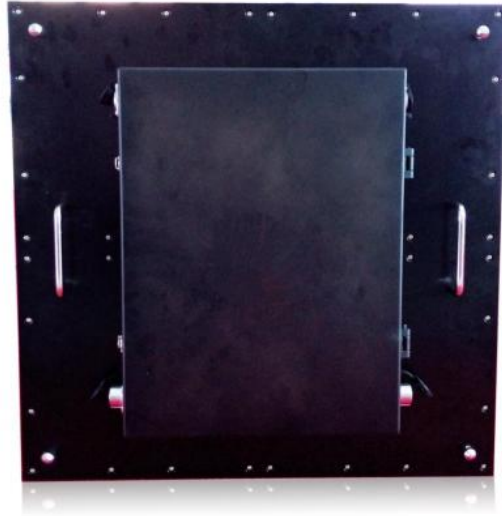

**Vegoo** 威固电子 **Shenzhen Weigu Electronic Technology Co., Ltd.**

☎ 86-15118043086    ✉ Linda@vegooled.com    🌐 hdled-display.com

806 Building 1 Geya Technology Building, Clock Base, Ma Tou community, Ma Tian Street, Guangming District, Shenzhen, China