



High Brightnes Waterproof Dustproof Outdoor Led Module P10 Full Color Led Display

Our Product Introduction


Basic Information

- Place of Origin: China
- Brand Name: Vgeoo
- Certification: Ce/ROHS/FCC/
- Model Number: VG-RD P10
- Minimum Order Quantity: 1 Sq.m
- Packaging Details: Plywood case / Flight case / Carton box
- Delivery Time: 7 days



Product Specification

- Product Name: P10 Outdoor Full Color LED Display
- Pixel Pitch: 10mm
- Density: 10,000 Pixel/m²
- Moduel Size(L×W)mm: 320mm×160mm
- Cabinet Size(L×W×H)mm: 960mm×960mm×130mm
- Module Resolution: 32×16
- Cabinet Resolution: 96×96
- Driving IC: MBI5124 Or ICN 2038S
- Brightness: 7500CD /
- Contrast: 1000:1
- Highlight: led display module, led video module

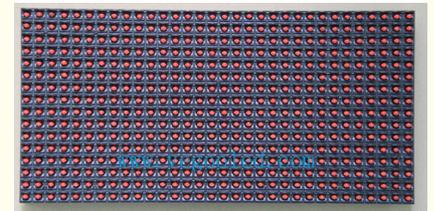

for more products please visit us on hdled-display.com

Product Description

waterproof, dustproof P10 Outdoor Full color LED Display

Description:

1. Low power consumption;
2. High brightness;
3. Any form what customers required;
4. Low price and timely delivery time;
5. Professional team guide hand by hand and technical supporting;
6. Riched and matured experience on manufacture LED display;
7. Owed many controller suppliers.

Protection

waterproof, dustproof, high temperature pervention, anticorrosion, smoulderproof, anti-static, shockproof, lightningproof, smoke alarm and temperature alarm. (Be customized)

P10 Outdoor Full color LED Display Specification

Product Name	Specification
Pixel Pitch	10mm
Pixel Configuration	1R1G1B/SMD3535
Density	10,000 pixel/m ²
Module Size(L×W)mm	320mm×160mm
Cabinet Size(L×W×H)mm	960mm×960mm×130mm
Module Resolution	32×16
Cabinet Resolution	96×96
Driving Method	1/ 2 Scan
Driving IC	MBI5124 or ICN 2038S
Brightness	7500CD /
Contrast	1000:1
Brightness Adjustment	Auto and Manual
Power Consumption	Max Power: 700W
	Average power: 300W
Module Weight	0.28kg
Color Temperature	9500K—11500K
Horizontal Viewing Angle	140°
Vertical Viewing Angle	140°
Signal Processing	10 or 14bit
Grey Processing	1024×1024×1024 16834×16834×16834
Control Distance	cable100m,Multimode500m,Single mode 2km
Frame Frequency	65 Hz
Refresh Rate	>1920Hz
Control Mode	Synchronous/Asynchronous
The Opposite Calibration Curve	With Eight Optional Gamma Calibration Curve
	Users can choose the recommended curve or adjust it based on actual situation
MTBF	>50000 hours
Life Span	100,000 Hours
Operating Temperature	Working : -20 - 65 °C
	Storage : -40 - 85 °C
Environment Temperature	-30°C to 60°C; humidity Rh10% to 95%
Remote Control	Can realize remote control and send alarm signal to operators in case of logging failure (Be customized)
Self-checking Technique	Self-inspection, communication test, power test, temperature monitoring (Be customized)
Operating System Platform	WindowsNT,Windows2000,WindowsXP,Windows7

Power Supply	AC 85-264V
Protection	waterproof, dustproof, high temperature pervention, anticorrosion, smoulderproof, anti-static, shockproof, lightningproof, smoke alarm and temperature alarm. (Be customized)

Upgrade Service :

Unschedule,we will upgrade our system of products without extra formal; we'll do our best to help users with upgrading ; the following conditions are excluded by this warranty :

1. Without approved documents;
2. Series code on products having been torn or changed ;
3. Damage caused by lighting strike or electrical problems;
4. Risks caused by irresistible incidents includes all kinds of natural disasters, fire, wars, policy changes, and some other human error accidents.
5. Users or third party refit or repaired by themselves without VEGOO's permission ;
6. Water intrusion or corrosion caused by improper keeping or operating ;
7. Over period of free maintenance .





86-15118043086



Linda@vegooled.com



hdled-display.com

806 Building 1 Geya Technology Building, Clock Base, Ma Tou community, Ma Tian Street, Guangming District ,
Shenzhen, China