

P3.91 Indoor Full Color LED Display Video Walls RGB 1000cd/ Brightness No Ghosting

Our Product Introduction

for more products please visit us on hdled-display.com

Basic Information

- Place of Origin: Made in China
- Brand Name: Vegoo
- Certification: CE/ROHS/FCC
- Model Number: VG-RD 6
- Minimum Order Quantity: 1 sq.m
- Packaging Details: Flight case
- Delivery Time: 15-20 days
- Supply Ability: 3000sq.m/month



Product Specification

- Product Name: P3.91 Indoor LED Display
- Pixel Pitch: 3.91mm
- Pixel Configuration: 1R1G1B/SMD2121 Black Lamp
- Density: 65,536 Pixel/m²
- Module Size(L×W)mm: 250mm×250mm
- Cabinet Size(L×W×H)mm: 500mm×1000mm
- Brightness: 1000cd/
- Contrast: 1000:1
- Highlight: indoor advertising led display, indoor full color led display screen



More Images



Product Description

P3.91 indoor led video walls RGB Hire Video


P3.91 500*500/1000mm Giant Led Display, Indoor Advertising Display Screens
Advertising Displays and their changes.


PRODUCTS FEATURES

Front service System
100.000 Lifespan
No Ghosting
Magnetic Modules
High Refresh Rate
High View Angles
High Contrast
Extremely Flat Module
Black LED Smd
Flexible Size Panel / Cabinet


Description:

1. P3.91 HD indoor led display.
2. Multiform file formats, such as VGA, Video, AVI, MOV, MPG, DAT, VOB and so on are comprehensive
3. Low consumption, stable performance, highly durable
4. High brightness & broad viewing angle, brightness can be adjusted automatically or manually
5. 2 years warranty, easy to install & maintenance
6. CE, ROHS, FCC,

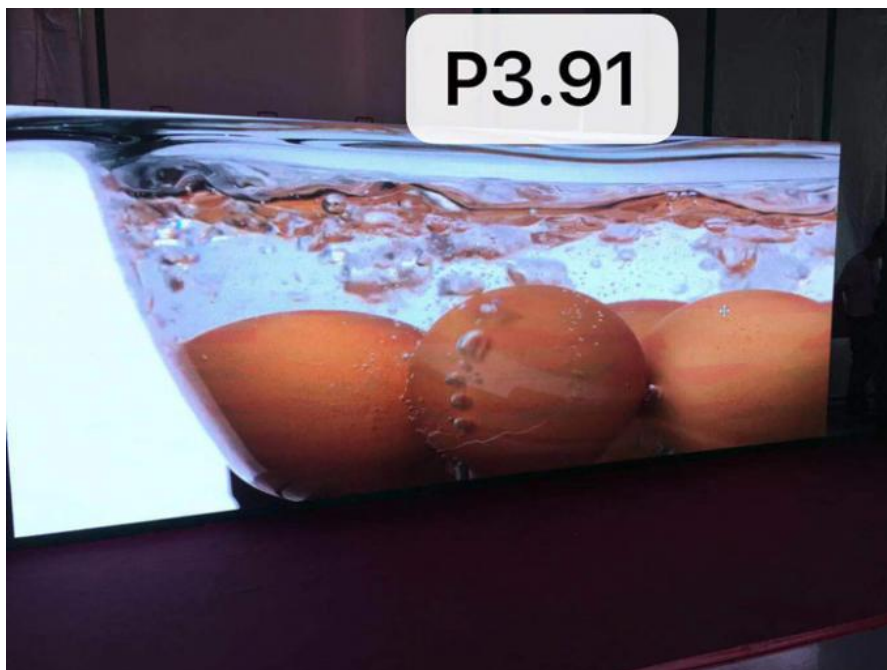

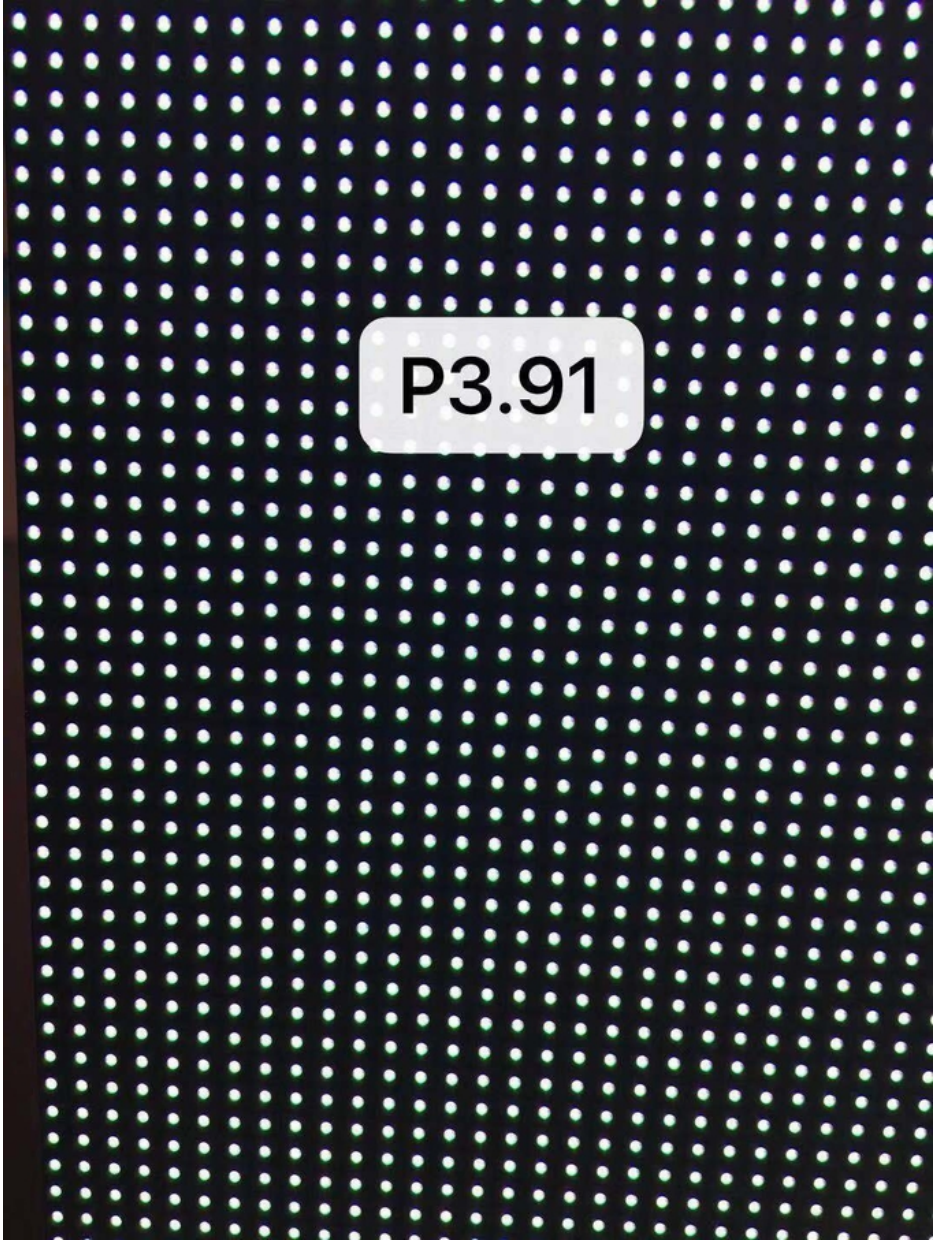

P3.91

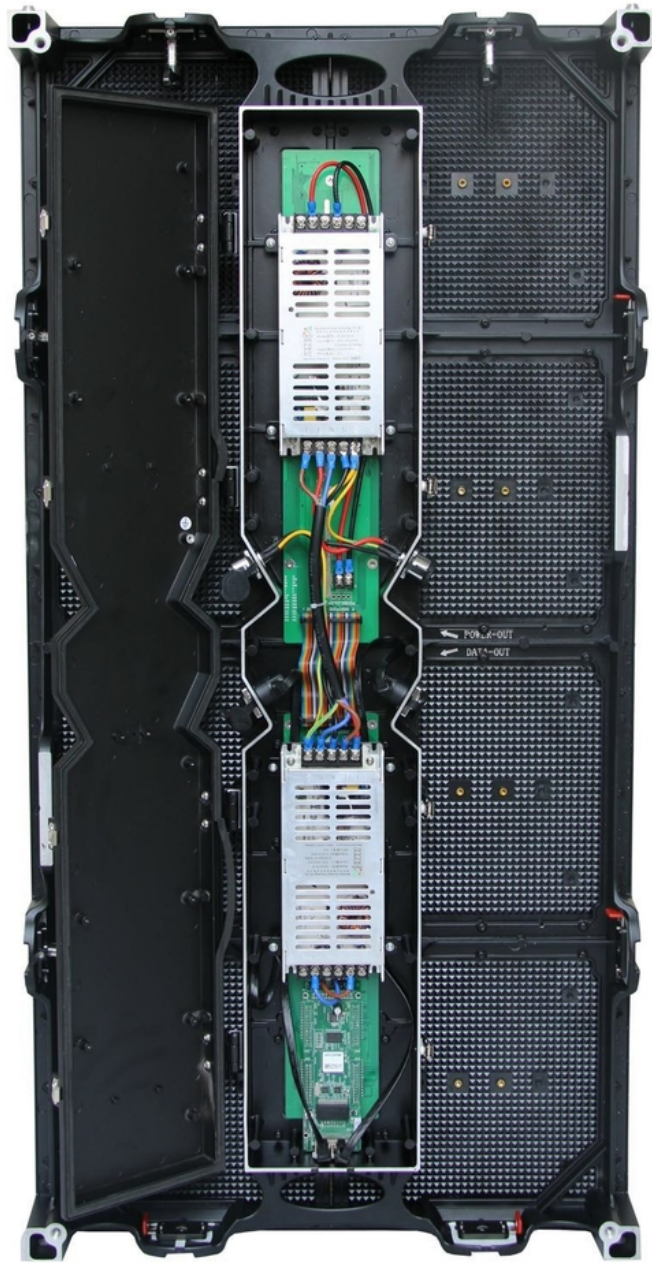



P3.91 Indoor Full color LED Display Specification

NO:	Product Name	Specification
1	Pixel Pitch	3.91mm
2	Pixel Configuration	1R1G1B/SMD2121 Black lamp
3	Density	65,536 pixel/m2
4	Module Size(L×W)mm	250mm×250mm
5	Cabinet Size(L×W×H)mm	500mm×1000mm×90mm
6	Module Resolution	64×64
7	Cabinet Resolution	128×256
8	Driving Method	1/16 Scan
9	Driving IC	MBI5124 or ICN 2038S
10	Brightness	1000cd/
11	Contrast	1000:1
12	Brightness Adjustment	Auto and Manual
13	Power Consumption	Max Power: 600W
14		Average power: 200W
15	Module Weight	0.52kg

16	Color Temperature	9500K—11500K
17	Horizontal Viewing Angle	160°
18	Vertical Viewing Angle	120°
19	Signal Processing	10 or 14bit
20	Grey Processing	1024×1024×1024 16834×16834×16834
21	Control Distance	cable100m,Multimode500m,Single mode 2km
22	Frame Frequency	65 Hz
23	Refresh Rate	>1920Hz
24	Control Mode	Synchronous/Asynchronous
25	The Opposite Calibration Curve	With Eight Optional Gamma Calibration Curve
26		Users can choose the recommended curve or adjust it based on actual situation
27	MTBF	>50000 hours
28	Life Span	100,000 Hours
29	Operating Temperature	Working : -20 - 65 °C
30		Storage : -40 - 85 °C
31	Environment Temperature	-30°C to 60°C; humidity Rh10% to 95%
32	Remote Control	Can realize remote control and send alarm signal to operators in case of logging failure (Be customized)
33	Self-checking Technique	Self-inspection, communication test, power test, temperature monitoring (Be customized)
34	Operating System Platform	WindowsNT,Windows2000,WindowsXP,Windows7
35	Power Supply	AC 110-220V
36	Protection	dustproof, high temperature pervention, anticorrosion, smoulderproof, anti-static, shockproof, lightningproof, smoke alarm and temperature alarm. (Be customized)

Service and Guarantees

Services Before-sale:Set a special telephone line to resolve the confusion from clients and supply free technology services by telephone.Consider the demands of clients carefully , study the situation of the installation condition , Team up the related staff and workers promptly , give clients design program details to help them choose the products which they wanted as soon as possible

Service In - sales :Try the best to meet the reasonable demands by clients Provisional changed .Keep close touch with the clients during the period if installation .Cooperate friendly with the clients, satisfy the clients with the best quality of led display .

Service After-sale:Normal products have one year guarantee, and whole life maintenance, free charges . we just charge materials cost only if products out off guarantee.You can down load and upgrade the related operating software of Led display freely from our company website , so as to resolve the problems when you use our led display .Check the quality of appliance , do maintenance job and ask good suggestions form clients on a regular time schedule .

Contact:

Seven Liu
Shenzhen Weigu Electronic Technology Co.,LTD
Whatsapp/WeChat/Phone:+8618991939397
Email:seven@vegooled.com
web: www.hdled-display.com



Shenzhen Weigu Electronic Technology Co., Ltd.



86-15118043086



Linda@vegooled.com



hdled-display.com

806 Building 1 Geya Technology Building, Clock Base, Ma Tou community, Ma Tian Street, Guangming District ,
Shenzhen, China