


## Digital LED Pantallas P1.875 High Resolution Indoor Full Color Panel 480x480mm Wide View Angles

Our Product Introduction

for more products please visit us on [hdled-display.com](http://hdled-display.com)

### Basic Information

- Place of Origin: China
- Brand Name: Vegoo
- Certification: CE/ROHS/FCC/CCC
- Model Number: VGHDP1.875
- Minimum Order Quantity: negotiation
- Price: negotiation
- Packaging Details: Plywood case / Flight case / Carton box
- Delivery Time: 15 working days
- Supply Ability: 3000 Sq.m / month

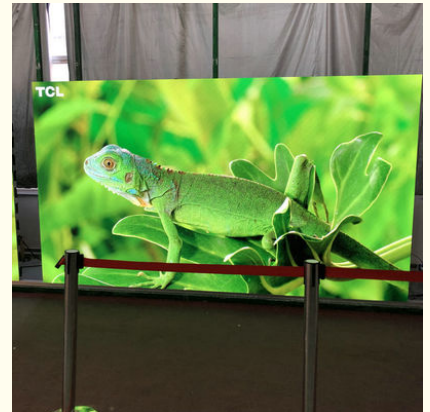

### Product Specification

- Product Name: LED Pantallas P1.8
- Advantage: High Resolution 4K
- Pixel Pitch: P1.875mm
- Pixel Configuration: 1R1G1B/SMD2121 Black Lamp
- Density: 62,500 Pixel/m<sup>2</sup>
- Module Size(L×W)mm: 256mm×128mm
- Brightness: 1000cd/
- View Angles: Wide View Angles
- Material: Aluminum Die Casting Cabinet 480
- Highlight: **high definition led display,**  
**commercial advertising led display**



## Product Description

### Digital LED Pantallas P1.875 High Resolution Indoor Full Color Panel 480x480mm Wide View Angles

#### Features:

High definition, High refresh rate, High resolution 3840Hz, Seamless installation Pantallas LED.

High temperature prevention, anticorrosion, smoulderproof, anti-static, shockproof, lightningproof, smoke alarm and temperature alarm. (Be customized)

#### Specification:

P1.875 Indoor Full color LED Display Specification		
N O:	Product Name	Specification
1	Pixel Pitch	1.875mm
2	Pixel Configuration	1R1G1B/SMD1515 Black lamp
3	Density	284,444 pixel/m <sup>2</sup>
4	Module Size(L×W)mm	240mm×240mm
5	Cabinet Size(L×W×H)mm	480mm×480mm×70mm
6	Module Resolution	128×128
7	Cabinet Resolution	256×256
8	Driving Method	1/32 Scan
9	Driving IC	MBI5153
10	Brightness	600cd/
11	Contrast	1000:1
12	Brightness Adjustment	Auto and Manual
13	Power Consumption	Max Power: 600W
14		Average power: 300W
15	Module Weight	0.5kg
16	Color Temperature	2000K—9500K
17	Horizontal Viewing Angle	160°
18	Vertical Viewing Angle	140°
19	Signal Processing	10 or 14bit
20	Grey Processing	1024×1024×1024 16834×16834×16834
21	Control Distance	cable100m, Multimode500m, Single mode 2km
22	Frame Frequency	65 Hz
23	Refresh Rate	>3840Hz
24	Control Mode	Synchronous/Asynchronous
25	The Opposite Calibration Curve	With Eight Optional Gamma Calibration Curve
26		Users can choose the recommended curve or adjust it based on actual situation
27	MTBF	>50000 hours
28	Life Span	100,000 Hours
29	Operating Temperature	Working : -20 - 65 °C
30		Storage : -40 - 85 °C
31	Environment Temperature	-30°C to 60°C; humidity Rh10% to 95%
32	Remote Control	Can realize remote control and send alarm signal to operators in case of logging failure (Be customized)
33	Self-checking Technique	Self-inspection, communication test, power test, temperature monitoring (Be customized)
34	Operating System Platform	WindowsNT, Windows2000, WindowsXP, Windows7
35	Power Supply	AC 85-264V
36	Protection Level	IP 41


#### Indoor Full Color LED Display Applications:

Shopping Malls

Music Venues and Concerts  
Large Offices  
Theater and Arts  
TV Shows  
Car Shows  
CCTV Digital signage  
Congress  
Airport Billboard

**Others:**

1. Budget friendly product, ideal for basic rental and fixed installations.
2. Extremely close view distances and wide view angles.
3. Silent operation, little heat generated
4. Standard panel design makes stocking, transportation, construction, spare parts and maintenance easy and simple.

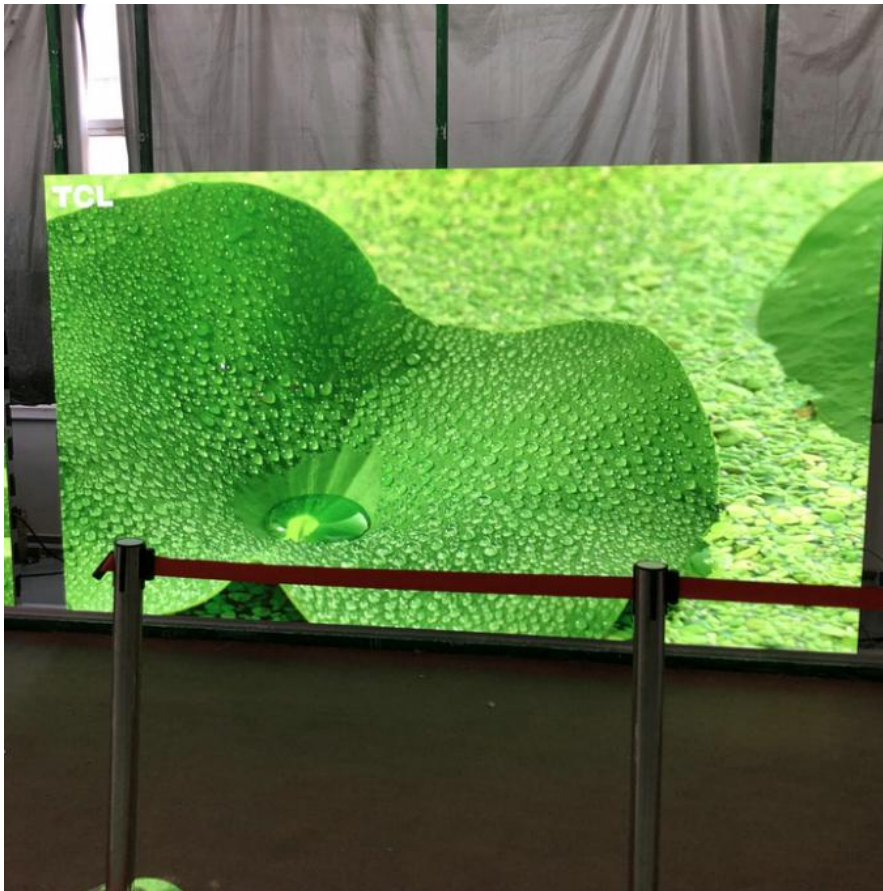

Fast inquiry contact person  
Sales Manager, Lady Seven  
Whatsapp: 86-18991939231

**Vegoo** 威固电子 **Shenzhen Weigu Electronic Technology Co., Ltd.**



86-15118043086



Linda@vegooled.com



hdled-display.com

806 Building 1 Geya Technology Building, Clock Base, Ma Tou community, Ma Tian Street, Guangming District ,  
Shenzhen, China