




## Full Color indoor Led Display P 2.5 Module Size 320 mm X 160 mm , Cabinet Size 640 mm X 640 mm

Our Product Introduction

for more products please visit us on [hdled-display.com](http://hdled-display.com)

### Basic Information

- Place of Origin: CHINA
- Brand Name: VEGOO
- Certification: CE ROHS FCC
- Model Number: VG-P2.5
- Minimum Order Quantity: 1 Pc
- Price: Usd 10-1000 per Pc
- Packaging Details: 0.2025 CBM
- Delivery Time: 8-15 working day
- Payment Terms: T/T
- Supply Ability: 3000 sqm per month



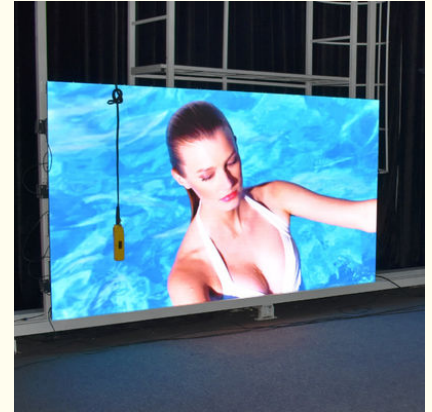


### Product Specification

- Pixel Pitch: 2.5mm
- Module Resolution: 128 X 64
- Pixel Density: 160000dot
- Module Weight: 0.3kg
- Cabinet Resolution: 256 X 256
- Cabinet Size: 640 X 640
- Maintenance: Front/black
- Cabinet Material: Die-casting Aluminium
- Usage: Indoor
- Brightness: 800 Cd/m2
- Color: Full-color
- Refresh Rate: 1920 Hz Or 3840 Hz
- Highlight: **full color led display board, indoor advertising led display**



### More Images



## Product Description



Our Product Introduction

for more products please visit us on [hdled-display.com](http://hdled-display.com)

### Indoor Full Color LED Video Wall Module Size 320mm X 160mm , Cabinet Size 640mm X 640mm

P3 Indoor Full color LED Display Specification		
NO:	Product Name	Specification
1	Pixel Pitch	2.5mm
2	Pixel Configuration	1R1G1B/SMD2121 Black lamp
3	Density	16000pixel/m2
4	Moduel Size(L×W)mm	320mm×160mm
5	Cabinet Size(L×W×H)mm	576mm×576mm×90mm
6	Module Resolution	128 ×64
7	Cabinet Resolution	256×256
8	Driving Method	1/32 Scan
9	Driving IC	MBI5124 or ICN 2038S
10	Brightness	800cd/
11	Contrast	1000:1
12	Brightness Adjustment	Auto and Manual
13	Power Consumption	Max Power: 800W
14		Average power: 200W
15	Module Weight	0.25kg
16	Color Temperature	9500K—11500K
17	Horizontal Viewing Angle	140°
18	Vertical Viewing Angle	140°
19	Signal Processing	10 or 14bit
20	Grey Processing	1024×1024×1024 16834×16834×16834
21	Control Distance	cable100m,Multimode500m,Single mode 2km
22	Frame Frequency	65 Hz
23	Refresh Rate	>1920Hz
24	Control Mode	Synchronous/Asynchronous
25	The Opposite Calibration Curve	With Eight Optional Gamma Calibration Curve
26		Users can choose the recommended curve or adjust it based on actual situation
27	MTBF	>50000 hours
28	Life Span	100,000 Hours
29	Operating Temperature	Working : -20 - 65 °C
30		Storage : -40 - 85 °C

31	Environment Temperature	-30°C to 60°C; humidity Rh10% to 95%
32	Remote Control	Can realize remote control and send alarm signal to operators in case of logging failure (Be customized)
33	Self-checking Technique	Self-inspection, communication test, power test, temperature monitoring (Be customized)
34	Operating System Platform	Windows7, Windows 10
35	Power Supply	AC 110-220V
36	Protection	dustproof, high temperature prevention, anticorrosion, smoulderproof, anti-static, shockproof, lightningproof, smoke alarm and temperature alarm. (Be customized)



**Shenzhen Weigu Electronic Technology Co., Ltd.**



86-15118043086



Linda@vegooled.com



hdled-display.com

806 Building 1 Geya Technology Building, Clock Base, Ma Tou community, Ma Tian Street, Guangming District, Shenzhen, China