


Indoor LED Display Video Wall / Big LED Screen Pixel Pitch 5MM Full Color Scan 1/16 IC ICN2038S LED Lamp 2121

Our Product Introduction

for more products please visit us on hdled-display.com


Basic Information

- Place of Origin: CHINA
- Brand Name: VEGOO
- Certification: ISO2000
- Model Number: VG-P5 ID
- Minimum Order Quantity: Negotiable
- Price: Negitionable
- Packaging Details: 80 * 80 * 100cm
- Delivery Time: 15 workding day
- Payment Terms: T/T
- Supply Ability: 3000M2 per Month

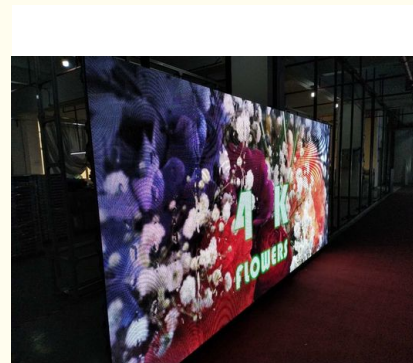


Product Specification

- Pixel Pitch 5mm Pixel Pitch 5MM
- Pixel Configuration: 1R1G1B/ Black Lamp
- Density: 40000 Pixel/m2
- Screen Dimension: Customized
- Warranty: 3 Years
- Brightness: 1000 Cd/m2
- Tube Chip Color: Full Color
- Application: Live Events Led Display,Indoor
- Scan Mode: 1/16scan
- Module Resolution: 64*32
- Life Span: 100000hours
- Led Type: SMD2121
- Refresh Rate: 1920/3840
- Highlight: indoor advertising led display,

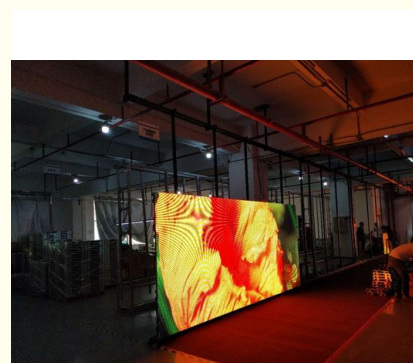

More Images



Product Description

Pixel Pitch	5mm
Pixel Configuration	1R1G1B/SMD3528 Black lamp
Density	40,000 pixel/m ²
Module Size(L×W)mm	320mm×160mm
Cabinet Size(L×W×H)mm	640mm×640mm×90mm
Module Resolution	64×32
Cabinet Resolution	128×128
Driving Method	1/16 Scan
Driving IC	MBI5124
Brightness	800CD/
Contrast	1000:01:00
Brightness Adjustment	Auto and Manual
Power Consumption	Max Power: 600W
	Average power: 200W
Module Weight	0.45kg
Color Temperature	9500K—11500K
Horizontal Viewing Angle	140°
Vertical Viewing Angle	140°
Signal Processing	10 or 14bit
Grey Processing	1024×1024×1024
	16834×16834×16834
Control Distance	cable100m,Multimode500m,Single mode 2km
Frame Frequency	65 Hz
Refresh Rate	>1920Hz
Control Mode	Synchronous/Asynchronous
The Opposite Calibration Curve	With Eight Optional Gamma Calibration Curve
	Users can choose the recommended curve or adjust it based on actual situation
MTBF	>50000 hours
Life Span	100,000 Hours
Operating Temperature	Working : -20 - 65 °C
	Storage : -40 - 85 °C
Environment Temperature	-30°C to 60°C; humidity Rh10% to 95%
Remote Control	Can realize remote control and send alarm signal to operators in case of logging failure (Be customized)
Self-checking Technique	Self-inspection, communication test, power test, temperature monitoring (Be customized)
Operating System Platform	WindowsNT,Windows2000,WindowsXP,Windows7
Power Supply	AC 110-220V
Protection	dustproof, high temperature pervention, anticorrosion, smoulderproof, anti-static, shockproof, lightningproof, smoke alarm and temperature alarm. (Be customized)



Shenzhen Weigu Electronic Technology Co., Ltd.



86-15118043086



Linda@vegooled.com

hdled-display.com

806 Building 1 Geya Technology Building, Clock Base, Ma Tou community, Ma Tian Street, Guangming District ,
Shenzhen, China