


Remote Control Full Color P5 HD SMD LED Module Display Electronic Advertising Video Screens

Our Product Introduction

for more products please visit us on hdled-display.com


Basic Information

- Place of Origin: China
- Brand Name: Vegoo
- Certification: Ce/ROHS/FCC/CCC
- Model Number: VG-SUN88819
- Minimum Order Quantity: Negotiable
- Price: negotiate
- Packaging Details: Plywood case / Flight case / Carton box
- Delivery Time: 7~25 days
- Payment Terms: T/T
- Supply Ability: 3000 sqm per month

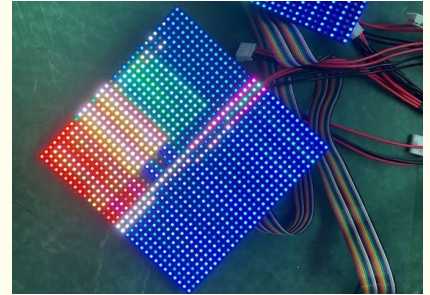


Product Specification

- Product Name: Full Color LED Module
- Pixel Pitch: 5mm
- Driving Method: 1/16 Scan
- Brightness: 4500cd/
- Density: 65,536 Pixel/m2
- Driving IC: MBI5124 Or ICN 2038S
- Contrast: 1000:1
- Warranty: 3years
- Highlight: led screen module, led video module

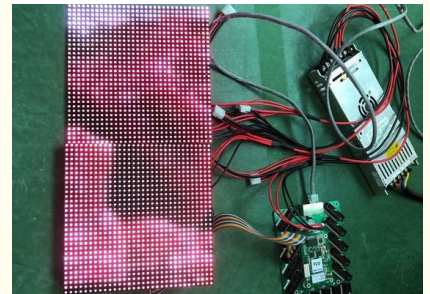

More Images



Product Description


Remote Control Full Color P5 HD LED SMD Module Display Electronic Advertising Video Screens

Our Advantage:

1.Remote Control:Will send alarm email to operators once accured LED lamp failure or other issue to make the lamp failure. (Be customized)

2.Protection:Waterproof IP65, high temperature pervention, anticorrosion, smoulderproof, anti-static, shockproof, lightningproof, smoke alarm and temperature alarm. (Be customized)

3.Customize:Pixel pitch is optional,it depends on your needs.The size of the modlue or cabinet also is optional.It can be choose for outdoor or indoor use.

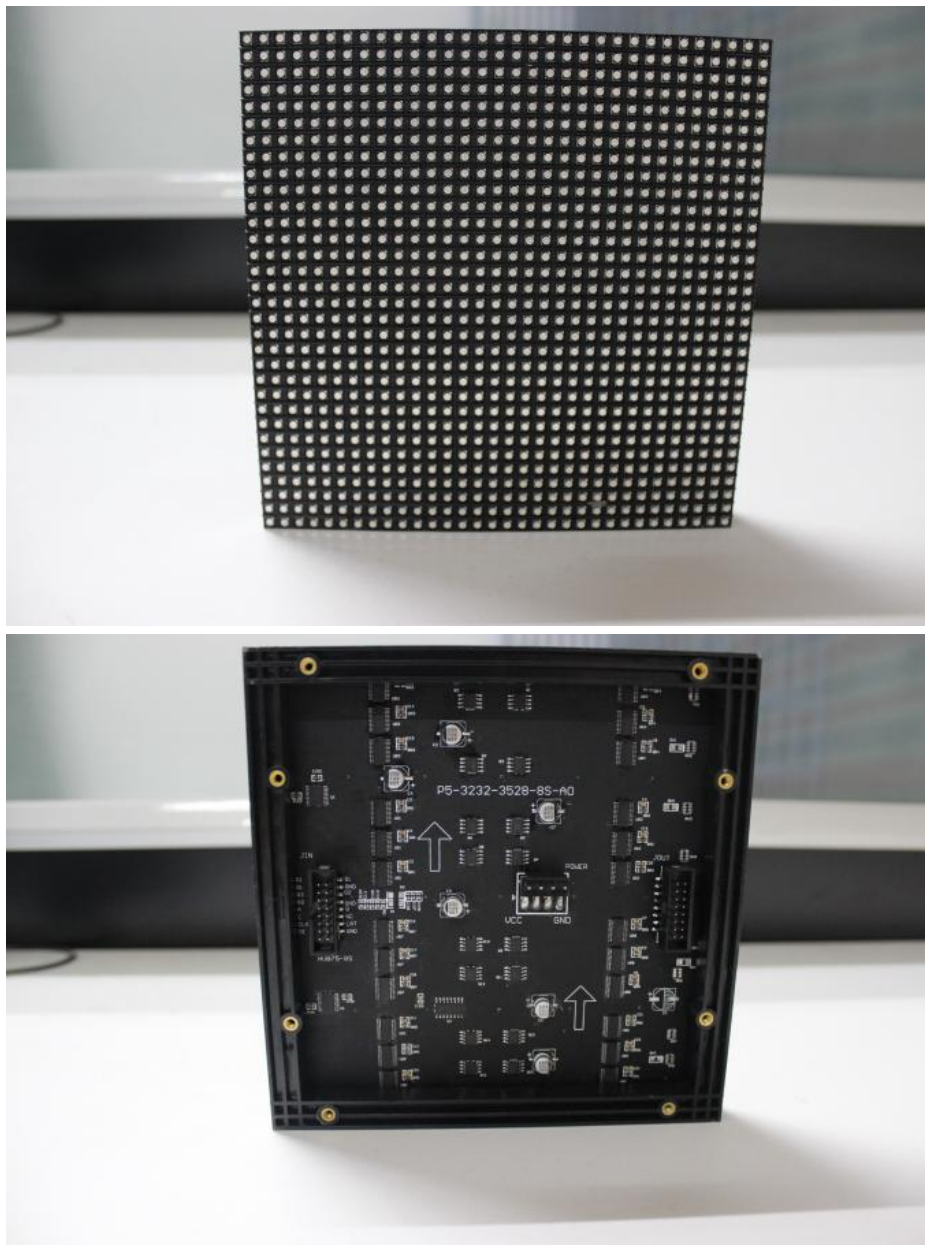

P5 Outdoor Full color LED Display Specification

Product Name	Specification
Pixel Pitch	5mm
Pixel Configuration	1R1G1B/SMD2727
Density	40,000 pixel/m ²
Moduel Size(L×W)m	320mm×160mm
m	

Cabinet Size(L×W×H) mm	640mm×640mm×130mm
Module Resolution	64×32
Cabinet Resolution	192×192
Driving Method	1/8 Scan
Driving IC	FM6124
Brightness	6000cd/
Contrast	6000 :1
Brightness Adjustment	Auto and Manual
Power Consumption	Max Power: 650W Average power: 325W
Cabinet Weight	12kg
Color Temperature	2000K—9500K
Horizontal Viewing Angle	140°
Vertical Viewing Angle	140°
Signal Processing	16bit
Grey Processing	1024×1024×1024 16834×16834×16834
Control Distance	cable100m,Multimode500m,Single mode 2km
Frame Frequency	65 Hz
Refresh Rate	>1920Hz
Control Mode	Synchronous/Asynchronous
The Opposite Calibration Curve	With Eight Optional Gamma Calibration Curve Users can choose the recommended curve or adjust it based on actual situation
MTBF	>50000 hours
Life Span	100,000 Hours
Operating Temperature	Working : -20 - 65 °C Storage : -40 - 85 °C
Environment Temperature	-30°C to 60°C; humidity Rh10% to 95%
Remote Control	Can realize remote control and send alarm signal to operators in case of logging failure (Be customized)
Self-checking Technique	Self-inspection, communication test, power test, temperature monitoring (Be customized)
Operating System Platform	WindowsNT,Windows2000,WindowsXP,Windows7
Power Supply	AC 110-220V/5V60Hz
Protection	waterproof, dustproof, high temperature pervention, anticorrosion, smoulderproof, anti-static, shockproof, lightningproof, smoke alarm and temperature alarm. (Be customized)

Our service

1. We will reply you within 24hours and resolve your problem as soon as possible.
2. OEM order accepted.
3. 3 years warranty
- 4.Free technician training and free repair during warranty after sales.
- 5.Top quality+Reasonable price+Responsible After Service=Successful & Win



86-15118043086



Linda@vegooled.com



hdled-display.com

806 Building 1 Geya Technology Building, Clock Base, Ma Tou community, Ma Tian Street, Guangming District ,
Shenzhen, China