

## High Brightness P10 DIP 7500cd/ Outdoor Full Color LED Display

Our Product Introduction

for more products please visit us on [hdled-display.com](http://hdled-display.com)


### Basic Information

- Place of Origin: China
- Brand Name: Vegoo
- Certification: CE/ROHS/FCC/CCC
- Model Number: VG-SUN88821
- Minimum Order Quantity: 1 unit
- Price: negotiation
- Packaging Details: Plywood case / Flight case / Carton
- Delivery Time: 5-25 days
- Payment Terms: L/C, T/T
- Supply Ability: 3000Sq.m




### Product Specification

- Product Name: Outdoor DIP LED Display
- Pixel Pitch: 10mm Or 16mm
- Moduel Size(L×W)mm: 320×160 Or 160×160
- Cabinet Size(L×W×H)mm: 960×960×130
- Contrast: 8000:1
- Brightness: 7500cd/
- Highlight: 7500cd/ led full color screen,  
P10 outdoor smd led display,  
DIP outdoor fixed led display

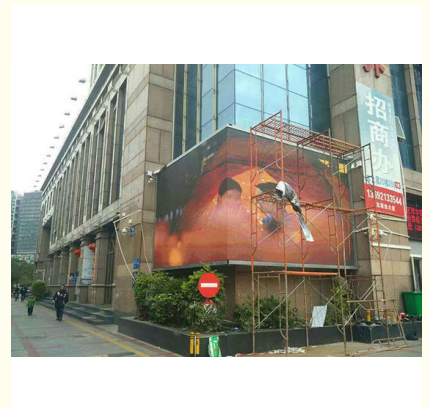

### More Images



## Product Description

### Waterproof IP65 High Brightness P10 Outdoor HD DIP LED Display Panels Advertising LED Video Screen Board



#### Our core advantage:

1. Higher brightness,can reach 7500cd/ .
2. Easy installation and maintenance.
3. Using a special mask design,protect the inner parts.
4. Brightness will be adjusted automatically according to external environment, no light pollution.(customized)
5. Power supply can be remote control.(customized)

#### P10 Outdoor Full color LED Display Specification

Product Name	Specification
Pixel Pitch	10mm
Pixel Configuration	1R1G1B/DIP 346
Density	10,000 pixel/m2
Moduel Size(L×W)mm	320mm×160mm or 160mm×160mm
Cabinet Size(L×W×H)mm	960mm×960mm×130mm
Module Resolution	32×16
Cabinet Resolution	96×96
Driving Method	1/ 4 Scan
Driving IC	MBI5124
Brightness	7500cd/
Contrast	8000 :1
Brightness Adjustment	Auto and Manual
Power Consumption	Max Power: 625W
	Average power: 300W
Cabinet Weight	30kg
Color Temperature	2000K—9500K
Horizontal Viewing Angle	140°
Vertical Viewing Angle	140°
Signal Processing	16bit
Grey Processing	1024×1024×1024
	16834×16834×16834
Control Distance	cable100m,Multimode500m,Single mode 2km
Frame Frequency	65 Hz
Refresh Rate	>1920Hz
Control Mode	Synchronous/Asynchronous
The Opposite Calibration Curve	With Eight Optional Gamma Calibration Curve
	Users can choose the recommended curve or adjust it based on actual situation
MTBF	>50000 hours
Life Span	100,000 Hours
Operating Temperature	Working : -20 - 65 °C
	Storage : -40 - 85 °C
Environment Temperature	-30°C to 60°C; humidity Rh10% to 95%
Remote Control	Can realize remote control and send alarm signal to operators in case of logging failure (Be customized)
Self-checking Technique	Self-inspection, communication test, power test, temperature monitoring (Be customized)
Operating System Platform	WindowsNT,Windows2000,WindowsXP,Windows7
Power Supply	AC 110-220V/5V60Hz

Protection	waterproof, dustproof, high temperature pervention, anticorrosion, smoulderproof, anti-static, shockproof, lightningproof, smoke alarm and temperature alarm. (Be customized)
------------	---

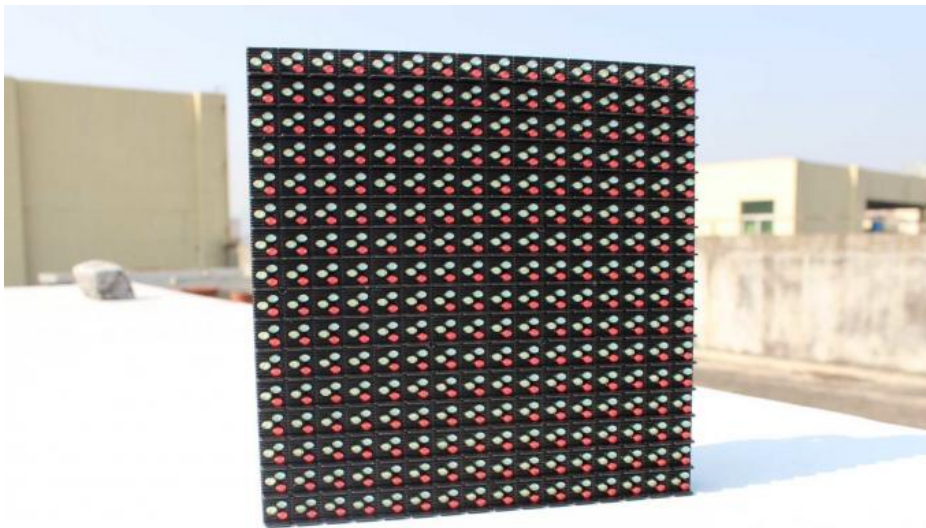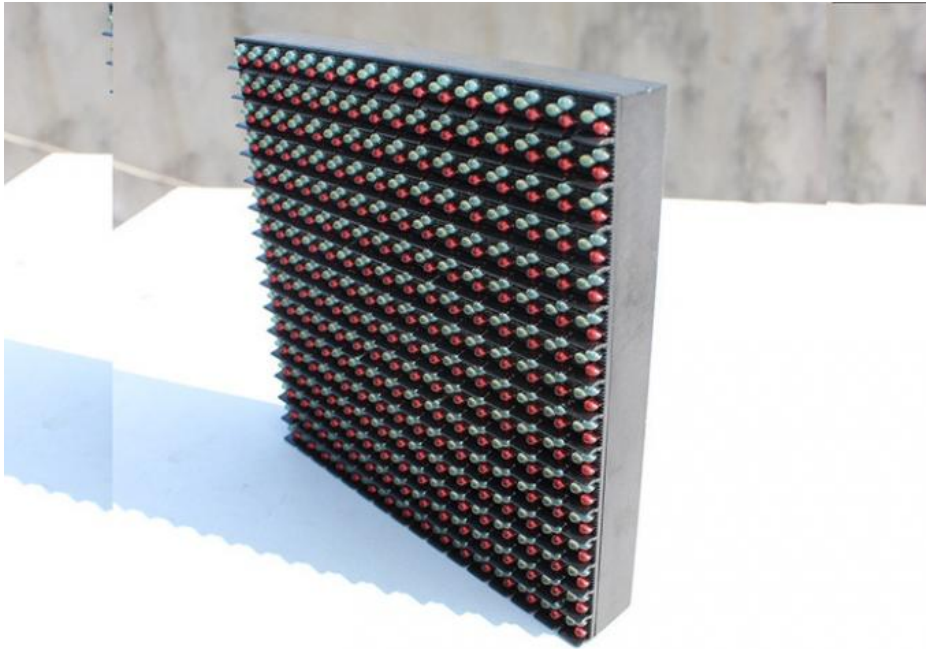

#### **Customer Service:**

- 1) Guarantee Time: Within three year after delivery form factory
  - 2) Maintenance Coverage : LED modules,Power supply ,Control system and other accessories ( This warranty exclude accessories purchasing form other factory )
  - 3) Maintenance Mode :By returned maintenance , through express or by other way
  - 4) Response time for maintenance :
- Return mode: after receiving the returned products, we will repaired them within 24 hours and send them back to the user;
- Telephone or internet mode: we will contact user within 2 hours after getting informations and give solution within 8 hours;
- On-site mode: ( only for user inside china ) after receiving maintenance request , we will respond within 48 hours to user in Guangdong province; 72 hours to user outside Guangdong province, In the case of some special conditions , problems could be solved on the basis of friendly negotiation between two parties.



**Shenzhen Weigu Electronic Technology Co., Ltd.**



86-15118043086



Linda@vegooled.com



hdled-display.com

806 Building 1 Geya Technology Building, Clock Base, Ma Tou community, Ma Tian Street, Guangming District ,  
Shenzhen, China