


## Ultra Thin High Definition 4.81mm 52×52 Rental LED Display

Our Product Introduction

for more products please visit us on [hdled-display.com](http://hdled-display.com)

### Basic Information

- Place of Origin: China
- Brand Name: Vegoo
- Certification: CE/ROHS/FCC/CCC
- Model Number: VG-SUN88836
- Minimum Order Quantity: Negotiation
- Price: Negotiable
- Packaging Details: Flight case plywood box, carton
- Delivery Time: 15-30 days
- Payment Terms: L/C, T/T
- Supply Ability: 3000sq.m/month

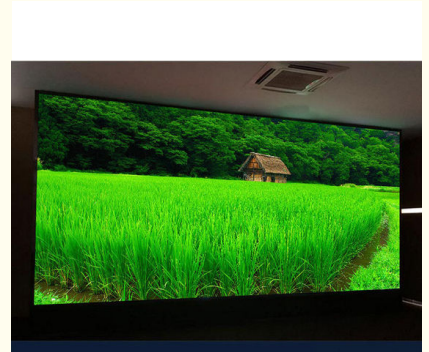

### Product Specification

- Product Name: Rental LED Display
- Pixel Pitch: 4.81mm
- Module Size(L×W)mm: 250mm×250mm
- Cabinet Size(L×W)mm: 500mm×1000mm×90mm
- Brightness: 1000cd/
- Contrast: 1000/1
- Highlight: 52×52 outdoor rental led display,  
4.81mm indoor rental led display



### More Images



## Product Description

### High Definition Indoor Rental LED Display Video Wall Screens Portable Ultra-Thin Cabinet

#### Rental LED Display Quick Details:

1. RGB,full color.
2. Professional service for 24hours.
3. Warranty:3years.
4. Spare parts supply according to customers actual needs.
5. VGA, Video, AVI, MOV, MPG, DAT, VOB and so on are available.
6. Controlled by PC via LAN,remote control also can be operated.
7. Brightness, contrast, saturation can be adjusted.



#### P4.81 Indoor Full color LED Display Specification

Product Name	Specification
Pixel Pitch	4.81mm
Pixel Configuration	1R1G1B/SMD2121 Black lamp
Density	43,243 pixel/m <sup>2</sup>
Module Size(L×W)mm	250mm×250mm
Cabinet Size(L×W×H)mm	500mm×1000mm×90mm

Module Resolution	52×52
Cabinet Resolution	104×208
Driving Method	1/13 Scan
Driving IC	MBI5124 or FM6124
Brightness	1000cd/
Contrast	1000:1
Brightness Adjustment	Auto and Manual
Power Consumption	Max Power: 420W Average power: 240W
Cabinet Weight	15kg
Color Temperature	2000K—9500K
Horizontal Viewing Angle	140°
Vertical Viewing Angle	140°
Signal Processing	16bit
Grey Processing	1024×1024×1024 16834×16834×16834
Control Distance	cable100m,Multimode500m,Single mode 2km
Frame Frequency	65 Hz
Refresh Rate	>1920Hz
Control Mode	Synchronous/Asynchronous
The Opposite Calibration Curve	With Eight Optional Gamma Calibration Curve Users can choose the recommended curve or adjust it based on actual situation
MTBF	>50000 hours
Life Span	100,000 Hours
Operating Temperature	Working : -20 - 65 °C Storage : -40 - 85 °C
Environment Temperature	-30°C to 60°C; humidity Rh10% to 95%
Remote Control	Can realize remote control and send alarm signal to operators in case of logging failure (Be customized)
Self-checking Technique	Self-inspection, communication test, power test, temperature monitoring (Be customized)
Operating System Platform	WindowsNT,Windows2000,WindowsXP,Windows7
Power Supply	AC 110-220V/5V60Hz
Protection Level	IP 45

## FAQ

Q1: How can I place an order?

A: Please provide the details of your requirements (installation site, size, viewing angle) as clear as possible, we will resolve it then.

Q2: What is the lead time for order?

A: Normally 20 days and the exact time depends on your order quantity, if we have in stock, it can be delivered within 7 days.

Q3:What is our warranty?

Our warranty is based on different type led screen, about 1-3years.We will free repair within warrenty period,only charge material cost beyond the warrenty.

Q4:How to be our distributor?

To be our distributor, We can share our profit together with you in every year.



86-15118043086



Linda@vegooled.com



naled-display.com

806 Building 1 Geya Technology Building, Clock Base, Ma Tou community, Ma Tian Street, Guangming District ,  
Shenzhen, China