

P10 Fixed 960*960mm 1R1G1B Outdoor Full Color LED Display

Our Product Introduction

for more products please visit us on hdled-display.com


Basic Information

- Place of Origin: China
- Brand Name: Vegoo
- Certification: CE
- Model Number: VG-P8-DH3
- Minimum Order Quantity: 1sqm
- Price: \$360/Sqm
- Packaging Details: Plywood case / Flight case / Carton box
- Delivery Time: 10-20 days
- Payment Terms: T/T
- Supply Ability: 5000 Sqm/month




Product Specification

- Pixel Pitch: 10mm
- Module Size(L×W)mm: 320mm×160mm
- Cabinet Size(L×W×H)mm: 960mm×960mm×130mm
- Color: Full Color
- Highlight: **1R1G1B outdoor led screen hire, 960*960mm smd led display, P10 outdoor led billboard**

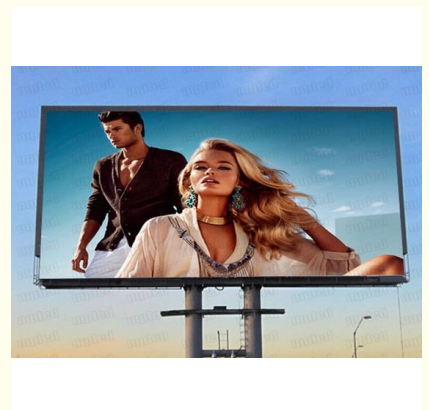

More Images



Product Description

P10 Fixed Installation Outdoor Advertising LED Display Screen Video Wall 960*960mm cabinet Description

- 1, P10 1R1G1B led display, with 10000dots/sqm, which guarantee vivid and clear image effect.
- 2, Cabinets with Protection grade IP65 , suitable for all outdoor working environment.
- 3, Fast locks at the four sides of the cabinet, easy assemble and be piled up and be hoisted.
- 4, Backside maintenance. Exterior exposed module screws, easy dismantling.

P10 Outdoor Full color LED Display Specification

NO:	Product Name	Specification
1	Pixel Pitch	10mm
2	Pixel Configuration	1R1G1B/SMD3535
3	Density	10,000 pixel/m ²
4	Module Size(L×W)mm	320mm×160mm
5	Cabinet Size(L×W×H)mm	960mm×960mm×130mm
6	Module Resolution	32×16
7	Cabinet Resolution	96×96
8	Driving Method	1/ 4 Scan
9	Driving IC	FM6124
10	Brightness	5500cd/
11	Contrast	6000 :1
12	Brightness Adjustment	Auto and Manual
13	Power Consumption	Max Power: 520W
14		Average power: 250W
15	Cabinet Weight	28kg
16	Color Temperature	2000K—9500K
17	Horizontal Viewing Angle	140°
18	Vertical Viewing Angle	140°
19	Signal Processing	16bit
20	Grey Processing	1024×1024×1024 16834×16834×16834
21	Control Distance	cable100m,Multimode500m,Single mode 2km
22	Frame Frequency	65 Hz
23	Refresh Rate	>1920Hz
24	Control Mode	Synchronous/Asynchronous
25	The Opposite Calibration Curve	With Eight Optional Gamma Calibration Curve
26		Users can choose the recommended curve or adjust it based on actual situation
27	MTBF	>50000 hours
28	Life Span	100,000 Hours
29	Operating Temperature	Working : -20 - 65 °C
30		Storage : -40 - 85 °C
31	Environment Temperature	-30°C to 60°C; humidity Rh10% to 95%
32	Remote Control	Can realize remote control and send alarm signal to operators in case of logging failure (Be customized)
33	Self-checking Technique	Self-inspection, communication test, power test, temperature monitoring (Be customized)
34	Operating System Platform	WindowsNT,Windows2000,WindowsXP,Windows7
35	Power Supply	AC 110-220V/5V60Hz
36	Protection	waterproof, dustproof, high temperature pervention, anticorrosion, smoulderproof, anti-static, shockproof, lightningproof, smoke alarm and temperature alarm. (Be customized)



Our Service and Mission

Pre-sale service

1. Reply enquiries in 24 hours.
2. Market research and forecast for customer.
3. Provide professional solutions based on customer's requirement.
4. Offer sample and all document as customers required.
5. Other services, such as factory visiting and so on.

In-sale service

1. Tracking report of production.
2. Quality test report for every order.
3. Photos and videos as per customer's requirement.

After-sale service

1. Lifetime maintenance and software upgrade.
2. Complaint respond period not exceed 24 hours, maintenance guidance and problem solution supplied in 48 hours.
3. Free technician training.
4. Full set of documents free of charge, which including installation guidance, software operation manual, easy maintenance manual and control system software CD and so on.
5. Engineer guide installation onsite if needed.

FAQ:

Q: What does it mean pixel pitch 6mm, 8mm, 10mm etc?

A: It means each two neighboring pixel distance is 6mm, 8mm, 10mm. Different pixel pitch has different resolution, pixel pitch is smaller, led screen resolution is higher.

Q: What information should I provide when send a inquiry?

A: 1, Please tell us will you install the led screen indoor or outdoor? 2, Will if for fixed installation or for rental use? 3, How many meters is the viewing distance?

Q: How long is the production time/delivery time?

A: If less than 100 square meters, production time is 7-15 working days.

Q: How about the warranty time?

A: Our products warranty is 2 full years. During thie period, if any of our led screen part not working(except for led module, and damaged not by man-made), we send you new part to replace. We pay half shipping cost.

Q: Can you guide us how to use the led screen?

A: Of course. We will offer you insallation video or manual, software manual. If you still don't know how to use, our engineer can help you by remote control. Besides, we can also send our engineer to your place to guide you how to use.



Shenzhen Weigu Electronic Technology Co., Ltd.



86-15118043086



Linda@vegooled.com



hdled-display.com

806 Building 1 Geya Technology Building, Clock Base, Ma Tou community, Ma Tian Street, Guangming District ,
Shenzhen, China