


Die Casting Aluminum P2.5 P3 P4 P5 SMD2121 HD LED Display

Our Product Introduction

for more products please visit us on hdled-display.com

Basic Information

- Place of Origin: China
- Brand Name: Vegoo
- Certification: CE
- Model Number: P1.25-DH-2
- Minimum Order Quantity: 1sqm
- Price: \$600
- Packaging Details: Plywood case / Flight case / Carton box
- Delivery Time: 10-20 days
- Payment Terms: T/T
- Supply Ability: 5000 Sqm/month

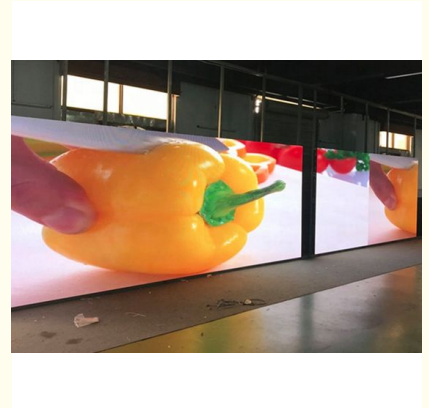


Product Specification

- Pixel Pitch: 4mm
- Module Size(L×W)mm: 256mm*128mm
- Pixel Configuration: SMD2121
- Usage: Indoor
- Highlight: **SMD2121 exterior led display,
P2.5 led curtain display,
P3 outdoor led video display**



More Images



Product Description

Die-casting Aluminum Cabinet Indoor Outdoor Rental Led Display Screen P2.5 P3 P4 P5 Led Video Wall

Product Feature:

- 1, Die-casting aluminum body, light weight for easy transportation and high accuracy installation., the weighs only 8kg.
- 2, Case series design, compatible with a variety of spacing.
- 3, Widely used in: shopping malls, supermarkets, conference rooms, hotels, etc.
- 4, Convenient in transporting and installing & saving labor cost, suitable for flow shows.
- 5, Nice appearance and simple structures, Unique for rental led screen business.
- 6, High debugging brightness and no damage to gray scale, achieving the debugging technology for nice image.
- 7, 140 viewing angle, appealing to a wider audience, +/- 15 Angle adjustment is allowed for stage design.

P4 Indoor Full color LED Display Specification		
NO.	Product Name	Specification
1	Pixel Pitch	4mm
2	Pixel Configuration	1R1G1B/SMD2121 Black lamp
3	Density	62,500 pixel/m ²
4	Module Size(L×W)mm	256mm×128mm
5	Cabinet Size(L×W×H)mm	512mm×512mm×90mm
6	Module Resolution	64×32
7	Cabinet Resolution	128×128
8	Driving Method	1/16 Scan
9	Driving IC	MBI5124 or FM6124
10	Brightness	1000cd/
11	Contrast	1000:1
12	Brightness Adjustment	Auto and Manual
13	Power Consumption	Max Power: 410W
14		Average power: 200W
15	Cabinet Weight	6.5kg
16	Color Temperature	2000K—9500K
17	Horizontal Viewing Angle	140°
18	Vertical Viewing Angle	140°
19	Signal Processing	16bit
20	Grey Processing	1024×1024×1024 16834×16834×16834
21	Control Distance	cable100m, Multimode500m, Single mode 2km
22	Frame Frequency	65 Hz
23	Refresh Rate	>1920Hz
24	Control Mode	Synchronous/Asynchronous
25	The Opposite Calibration Curve	With Eight Optional Gamma Calibration Curve
26		Users can choose the recommended curve or adjust it based on actual situation
27	MTBF	>50000 hours
28	Life Span	100,000 Hours
29	Operating Temperature	Working : -20 - 65 °C
30		Storage : -40 - 85 °C
31	Environment Temperature	-30°C to 60°C; humidity Rh10% to 95%
32	Remote Control	Can realize remote control and send alarm signal to operators in case of logging failure (Be customized)
33	Self-checking Technique	Self-inspection, communication test, power test, temperature monitoring (Be customized)
34	Operating System Platform	WindowsNT, Windows2000, WindowsXP, Windows7
35	Power Supply	AC 110—220V/5V60Hz

36	Protection Level	IP 45
----	------------------	-------





Application:

1. Advertising LED display screen

LED display can perfect combine text, pictures, video. Commerical adversting.

2. Stadium LED display screen

In stadium to live show, video play, slow motion playback, specific lens display, sports score information presentation.

Use in football field led screen fence, basketball stadium center screen, and screens in swimming stadium, Athletics stadium.

3. Transportation LED display screen

Widely use in the busy streets of city or on the highway.


Screens display weather, traffic regulations, to remind drivers to drive safely.

4. Stage rental LED display screen

Easily installed, removed and transport.

Widely used in stage show, concert, theater, party, and other entertainment event as background.

LED control system

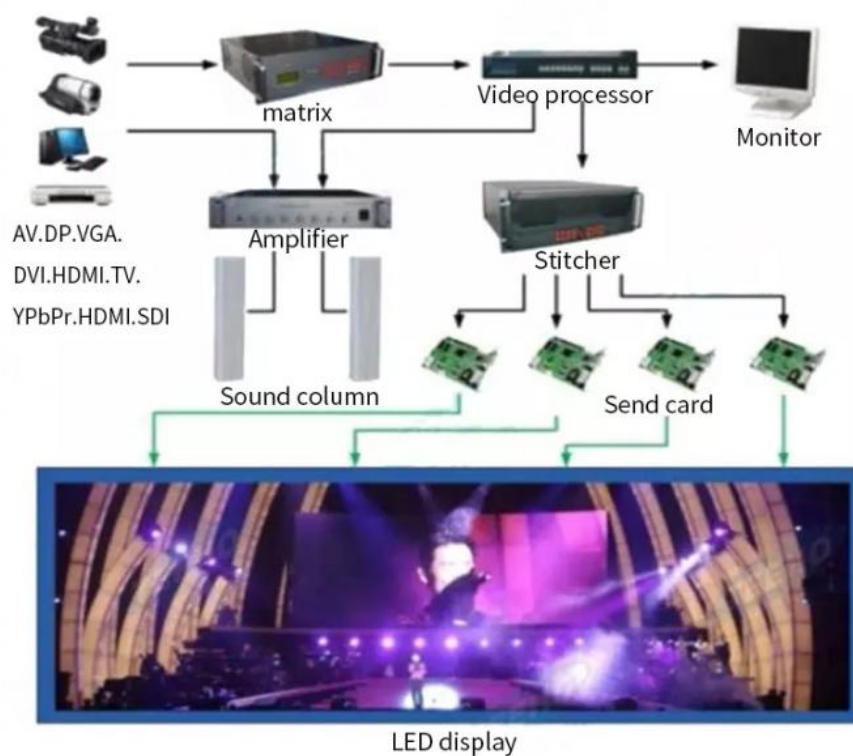

Packing&Shipping

PROFESSIONAL CERTIFICATE



ACCORDING TO THE DIFFERENT
PACKING PATTERNS OF DIFFERENT,
CARTON PACKING, FLIGHT CASE PACKING.

Our Services

1. We can provide customers a comprehensive solution delivery of series-related products
2. We can provide customers high quality products which allow them to scream
3. We can provide custom-made service.
4. We can provide customers one year free warranty, and support renewals extended
5. We can provide customers the free installation guidance and technical support
6. We are willing to provide any countries and regions in the world with products and technical support. At present, our product has covered more than 100 countries and regions.



Shenzhen Weigu Electronic Technology Co., Ltd.



86-15118043086



Linda@vegooled.com



hdled-display.com

806 Building 1 Geya Technology Building, Clock Base, Ma Tou community, Ma Tian Street, Guangming District, Shenzhen, China