



Full Color Waterproof Ip65 P10 320mmx160mm SMD LED Module

Our Product Introduction

for more products please visit us on hdled-display.com

Basic Information

- Place of Origin: China
- Brand Name: VEGOO
- Certification: CE FCC ROHS
- Model Number: VG-P10MMM
- Minimum Order Quantity: 1 Pc
- Price: Usd7-10 /Pc
- Packaging Details: 36 cm x 65 cm x 36 cm
- Delivery Time: 7-15days
- Payment Terms: T/T
- Supply Ability: 30000 Pcs Per Month





Product Specification

- Module Size: 320 Mm X 160 Mm
- Resolution: 32 X 16
- Brightness: >5500 Cd
- Led Chip: Smd 3535
- Refresh Rate: >1920
- Viewing Angle(°): H 120 V 120
- Operating Temperature(°C): -40 - +60,
- Pixel Pitch: 10 Mm
- Warranty: 1-3 Years
- Application: Outdoor Led Display
- Highlight: **320mmx160mm led smd module, P10 led rgb module, Ip65 led rgb module**




More Images



Product Description

About us:

Shenzhen WeiGu Electronic Technology Co.,Ltd is specially engaged in research, production and marketing of LED display, full-color LED display and LED display project solutions and their parts. We provide our customers with service equipment and training etc, you buy from us not only LED display products but also our forever technical assistance !

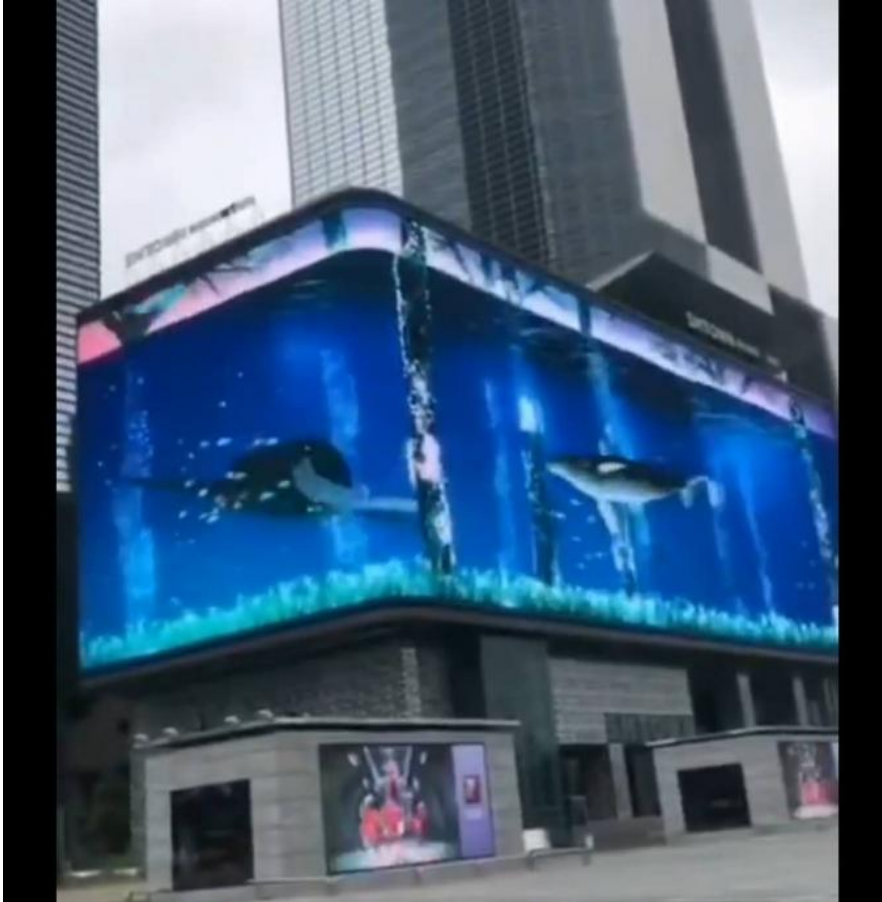

Applications:

Our products widely used in various public places such as commercial plaza ,Museum , Entertainment Venue,Stations ,Airport ,Stadiums,Transport Facilities, Financial Institutions, Theater, Stage etc.....



Product Name	Specification
Pixel Pitch	10mm
Pixel Configuration	1R1G1B/DIP 346
Density	10,000 pixel/m ²
Module Size(L×W)mm	320mm×160mm or 160mm×160mm
Module Resolution	32×16
Driving Method	1/ 4 Scan
Driving IC	MBI5124
Brightness	5500cd/
Contrast	8000 :1
Brightness Adjustment	Auto and Manual
Power Consumption	Max Power: 625W
	Average power: 300W
Color Temperature	2000K—9500K
Horizontal Viewing Angle	140°
Vertical Viewing Angle	140°
Signal Processing	16bit
Grey Processing	1024×1024×1024 16834×16834×16834
Control Distance	cable100m,Multimode500m,Single mode 2km
Frame Frequency	65 Hz
Refresh Rate	>1920Hz
Control Mode	Synchronous/Asynchronous
The Opposite Calibration Curve	With Eight Optional Gamma Calibration Curve
	Users can choose the recommended curve or adjust it based on actual situation
MTBF	>50000 hours
Life Span	100,000 Hours
Operating Temperature	Working : -20 - 65 °C
	Storage : -40 - 85 °C
Environment Temperature	-30°C to 60°C; humidity Rh10% to 95%
Remote Control	Can realize remote control and send alarm signal to operators in case of logging failure (Be customized)
Self-checking Technique	Self-inspection, communication test, power test, temperature monitoring (Be customized)
Operating System Platform	WindowsNT,Windows2000,WindowsXP,Windows7
Power Supply	AC 110-220V/5V60Hz
Protection	waterproof, dustproof, high temperature pervention, anticorrosion, smoulderproof, anti-static, shockproof, lightningproof, smoke alarm and temperature alarm. (Be customized)



Shenzhen Weigu Electronic Technology Co., Ltd.



86-15118043086



Linda@vegooled.com



hdled-display.com

806 Building 1 Geya Technology Building, Clock Base, Ma Tou community, Ma Tian Street, Guangming District, Shenzhen, China