

Seamless Splicing IP65 P6.67 Outdoor Full Color LED Display

Our Product Introduction

for more products please visit us on hdled-display.com

Basic Information

- Place of Origin: CHINA
- Brand Name: VEGOO
- Certification: CE ROHS FCC CCC
- Model Number: VG-SUN88842
- Minimum Order Quantity: 1 SQM
- Price: negotiate
- Packaging Details: flight case,plywood case,carton
- Delivery Time: 15-30 working days
- Payment Terms: T/T
- Supply Ability: 3000 sqm per month




Product Specification

- Pixel Pitch: 6.67mm
- Scan Mode: 1/6 Scan
- Brightness: 5500cd/
- Control Mode: Synchronous/Asynchronous
- Power Supply: AC 110-220V/5V60Hz
- Waterproof: IP65
- Highlight: P6.67 video wall advertising, IP65 digital screen advertising



More Images



Product Description


IP65 Outdoor Full Color LED Display P6.67 video wall advertising screen

Our advantage:

- 1.Quickly installation and easy to maintain
- 2.Aluminum is more portable and radiates heat well
- 3.Hd resolution
- 4.High precision cabinet,seamless splicing
- 5.High quality module splicing

P6.67 Outdoor Full color LED Display Specification

Product Name	Specification
Pixel Pitch	6.67mm
Pixel Configuration	1R1G1B/SMD3535
Density	22,545 pixel/m2
Module Size(L×W)mm	320mm×160mm
Cabinet Size(L×W×H)mm	640mm×640mm×90mm
Module Resolution	48×24
Cabinet Resolution	96×96
Driving Method	1/6 Scan
Driving IC	MBI5124
Brightness	5500cd/
Contrast	6000 :1
Brightness Adjustment	Auto and Manual
Power Consumption	Max Power: 650W
	Average power: 325W
Cabinet Weight	10.5kg
Color Temperature	2000K—9500K
Horizontal Viewing Angle	140°
Vertical Viewing Angle	140°
Signal Processing	16bit
Grey Processing	1024×1024×1024
	16834×16834×16834
Control Distance	cable100m,Multimode500m,Single mode 2km
Frame Frequency	65 Hz
Refresh Rate	>1920Hz
Control Mode	Synchronous/Asynchronous
The Opposite Calibration Curve	With Eight Optional Gamma Calibration Curve
	Users can choose the recommended curve or adjust it based on actual situation
MTBF	>50000 hours
Life Span	100,000 Hours
Operating Temperature	Working : -20 - 65 °C
	Storage : -40 - 85 °C
Environment Temperature	-30°C to 60°C; humidity Rh10% to 95%
Remote Control	Can realize remote control and send alarm signal to operators in case of logging failure (Be customized)
Self-checking Technique	Self-inspection, communication test, power test, temperature monitoring (Be customized)
Operating System Platform	WindowsNT,Windows2000,WindowsXP,Windows7
Power Supply	AC 110-220V/5V60Hz
Protection	waterproof, dustproof, high temperature pervention, anticorrosion, smoulderproof, anti-static, shockproof, lightningproof, smoke alarm and temperature alarm. (Be customized)

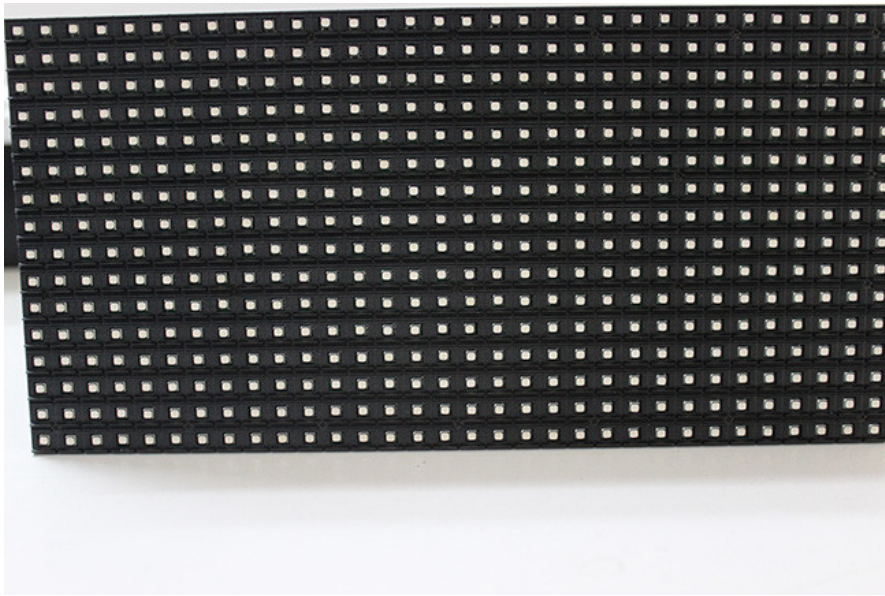

FAQ

Q1. What's fast delivery time?

The production can be controlled as fast as you need from 7 days to 25 days.

Q2. Can I just wait for the items at my door and no need to do others?

Yes, items can be delivery to your specific address and you just wait for receiving the items at your door.

Q3. The display will come to me in parts?and I have to install each part together?

Yes, but it's very easy. We will send you the instruction manual and also we can remote control to help you to adjust the software, everything.

Q4. How can I install the led display?

There are two way for you, one is hanging the display, the other is standing the display. Hanging bars and back stacking will be provided if need.



Shenzhen Weigu Electronic Technology Co., Ltd.



86-15118043086



Linda@vegooled.com



hdled-display.com

806 Building 1 Geya Technology Building, Clock Base, Ma Tou community, Ma Tian Street, Guangming District,
Shenzhen, China