


## P6 192x192mm SMD3535 LED Advertising Screen Module

Our Product Introduction

for more products please visit us on [hdled-display.com](http://hdled-display.com)

### Basic Information

- Place of Origin: China
- Brand Name: Vegoo
- Certification: CE
- Model Number: VG-P6-DH
- Minimum Order Quantity: 1sqm
- Packaging Details: Plywood case / Flight case / Carton box
- Delivery Time: 10-20 days
- Payment Terms: T/T
- Supply Ability: 5000 Sqm/month




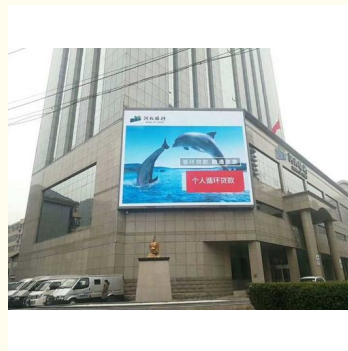


### Product Specification

- Panel Size: 192x192mm
- Density: 27777dots/sqm
- Usage: Outdoor
- Pixel Pitch: 6mm
- Highlight: SMD3535 outdoor display screen,  
P6 exterior led signs,  
192x192mm outdoor screen advertising



### More Images



### Product Description


P6 192x192mm SMD3535 Led Module Advertising Screen Outdoor Led Screen P6 Outdoor Display

P6 Outdoor Full color LED Display Specification

NO.	Product Name	Specification
1	Pixel Pitch	6mm
2	Pixel Configuration	1R1G1B/SMD3535

Our Product

3	Density	27,777 pixel/m2
4	Module Size(L×W)mm	192mm×192mm
5	Cabinet Size(L×W×H)mm	960mm×960mm×130mm
6	Module Resolution	32×32
7	Cabinet Resolution	160×160
8	Driving Method	1/8 Scan
9	Driving IC	FM6124
10	Brightness	6500cd/
11	Contrast	6000 :1
12	Brightness Adjustment	Auto and Manual
13	Power Consumption	Max Power: 810W
14		Average power: 405W
15	Cabinet Weight	25kg
16	Color Temperature	2000K—9500K
17	Horizontal Viewing Angle	140°
18	Vertical Viewing Angle	140°
19	Signal Processing	16bit
20	Grey Processing	1024×1024×1024 16834×16834×16834
21	Control Distance	cable100m,Multimode500m,Single mode 2km
22	Frame Frequency	65 Hz
23	Refresh Rate	>1920Hz
24	Control Mode	Synchronous/Asynchronous
25	The Opposite Calibration Curve	With Eight Optional Gamma Calibration Curve
26		Users can choose the recommended curve or adjust it based on actual situation
27	MTBF	>50000 hours
28	Life Span	100,000 Hours
29	Operating Temperature	Working : -20 - 65 °C
30		Storage : -40 - 85 °C
31	Environment Temperature	-30°C to 60°C; humidity Rh10% to 95%
32	Remote Control	Can realize remote control and send alarm signal to operators in case of logging failure (Be customized)
33	Self-checking Technique	Self-inspection, communication test, power test, temperature monitoring (Be customized)
34	Operating System Platform	WindowsNT,Windows2000,WindowsXP,Windows7
35	Power Supply	AC 110-220V/5V60Hz
36	Protection	waterproof, dustproof, high temperature pervention, anticorrosion, smoulderproof, anti-static, shockproof, lightningproof, smoke alarm and temperature alarm. (Be customized)

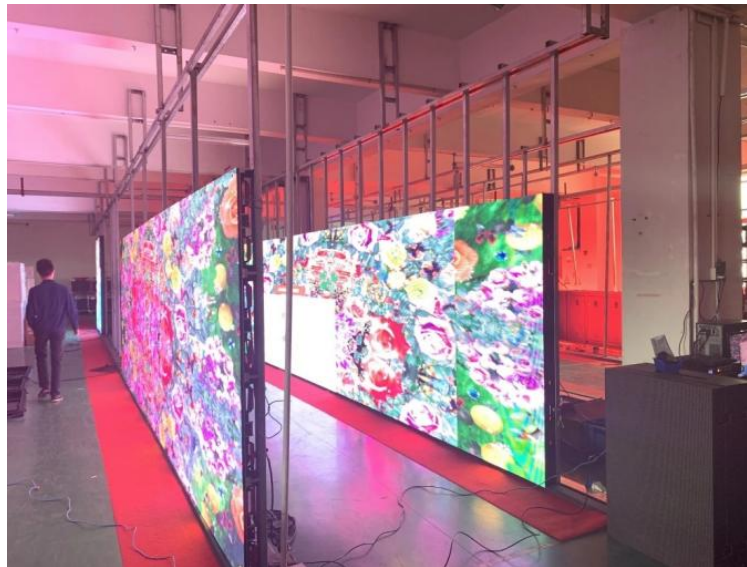



**Q1: Are you the manufacturer or trading company? and where is your factory?**

A1: We are professional manufacturer devote in producing Led outdoor, Led indoor display, rental display, stadium screen, advertising screen and stage screen etc. You are warmly welcome to visit our factory to learn the technical and maintenance skills and everything you need in our factory.

**Q2: May be we will need some samples, what is the lead time of samples and lead time of order?**

A2: We will arrange your sample of the charges within 15 days and arrange your order within 15-20 days after receiving your deposit.

**Q3: Which payment method does your company accept?**

A: We support T/T or Trade Assurance. For more payment methods, please contact our customer service.

**Q4: If have quality problems, how do you solve them?**

A: Please provide relevant videos and photos within one month of receipt of the shipment. We will verify it at first. If it is really quality problem, we will work with the engineer to assist you in solving the problem. If we cannot solve it, we will give you a refund or resend you new one for free, but we will not bear the freight.



**Shenzhen Weigu Electronic Technology Co., Ltd.**



86-15118043086



Linda@vegooled.com



hdled-display.com

806 Building 1 Geya Technology Building, Clock Base, Ma Tou community, Ma Tian Street, Guangming District, Shenzhen, China