

Ultrathin P2.5 1R1G1B Indoor Full Color LED Display

Our Product Introduction

for more products please visit us on hdled-display.com


Basic Information

- Place of Origin: CHINA
- Brand Name: VEGOO
- Certification: CE ROHS FCC CCC
- Model Number: VG-SUN88851
- Minimum Order Quantity: 1 SQM
- Price: negotiate
- Packaging Details: flight case,plywood case,carton
- Delivery Time: 15-30 working days
- Payment Terms: T/T
- Supply Ability: 3000 sqm per month



Product Specification

- Pixel Pitch: 2.5mm
- Density: 160,000 Pixel/m²
- Cabinet Resolutio: 192×192
- Module Size: 160mm×160mm
- Cabinet Size: 480mm×480mm×90mm
- Driving Method: 1/32 Scan
- Highlight: **P2.5 Indoor LED Video Panels, 1R1G1B led wall panel**

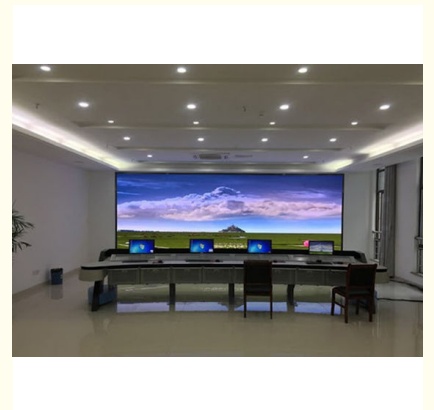

Product Description

High Precision Factory direct sales Indoor LED Video Panels Screen Walls P2.5 Ultrathin

Product advantages

1. The aluminum structure requires no fan, making the cabinet noiseless;
2. Approved by RoHS certification, Lead-free, environmental design;
3. P2.5 high refresh rate indoor full color LED display advertising video wall shows Fine and Smooth Picture
4. Combined with the brightness auto-adjusting technology and power supply, low current can save energy by over 35%;
5. Neutrik connectors are optional better connectivity;
6. Receiving card to card with LAN cable, simple, less failure rate;
7. Easy assembly easy dismantle;

P2.5 Indoor Full color LED Display Specification

Product Name	Specification
Pixel Pitch	2.5mm
Pixel Configuration	1R1G1B/SMD2121 Black lamp
Density	160,000 pixel/m ²
Module Size(L×W)mm	160mm×160mm
Cabinet Size(L×W×H)mm	480mm×480mm×90mm
Module Resolution	64×64
Cabinet Resolution	192×192
Driving Method	1/32 Scan
Driving IC	MBI5124/ICN2153/FM6353
Brightness	600cd/
Contrast	6000 :1
Brightness Adjustment	Auto and Manual
Power Consumption	Max Power: 900W Average power: 270W
Cabinet Weight	4.2kg
Color Temperature	2000K—9500K
Horizontal Viewing Angle	140°
Vertical Viewing Angle	140°
Signal Processing	16bit
Grey Processing	1024×1024×1024 16834×16834×16834
Control Distance	cable100m,Multimode500m,Single mode 2km
Frame Frequency	65 Hz
Refresh Rate	>1920Hz
Control Mode	Synchronous/Asynchronous
The Opposite Calibration Curve	With Eight Optional Gamma Calibration Curve Users can choose the recommended curve or adjust it based on actual situation
MTBF	>50000 hours
Life Span	100,000 Hours
Operating Temperature	Working : -20 - 65 °C Storage : -40 - 85 °C
Environment Temperature	-30°C to 60°C; humidity Rh10% to 95%

Remote Control	Can realize remote control and send alarm signal to operators in case of logging failure (Be customized)
Self-checking Technique	Self-inspection, communication test, power test, temperature monitoring (Be customized)
Operating System Platform	WindowsNT,Windows2000,WindowsXP,Windows7
Power Supply	AC 110-220V/5V60Hz
Protection	IP 45



Service and Guarantees

Services Before-sale:

Set a special telephone line to resolve the confusion from clients and supply free technology services by telephone. Consider the demands of clients carefully, study the situation of the installation condition, Team up the related staff and workers promptly, give clients design program details to help them choose the products which they wanted as soon as possible.

Service In - sales :

Try the best to meet the reasonable demands by clients Provisional changed .
Keep close touch with the clients during the period of installation .
Cooperate friendly with the clients, satisfy the clients with the best quality of led display .

Service After-sale:

Normal products have one year guarantee, and whole life maintenance, free charges . we just charge materials cost only if products out of guarantee.

You can download and upgrade the related operating software of Led display freely from our company website, so as to resolve the problems when you use our led display .

Check the quality of appliance, do maintenance job and ask good suggestions from clients on a regular time schedule .



86-15118043086



Linda@vegooled.com



hdled-display.com

806 Building 1 Geya Technology Building, Clock Base, Ma Tou community, Ma Tian Street, Guangming District ,
Shenzhen, China