


## P4 Indoor Full Color LED Display

Our Product Introduction

for more products please visit us on [hdled-display.com](http://hdled-display.com)


### Basic Information

- Place of Origin: CHINA
- Brand Name: VEGOO
- Certification: CE ROHS FCC CCC
- Model Number: VG-SUN88866
- Minimum Order Quantity: 1 SQM
- Price: negotiate
- Packaging Details: flight case,plywood case,carton
- Delivery Time: 15-30 working days
- Payment Terms: T/T
- Supply Ability: 3000 sqm per month

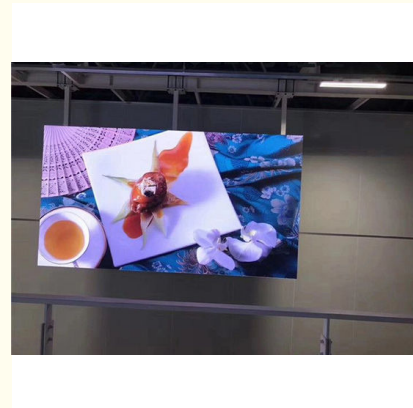

### Product Specification

- Pixel Pitch: 4mm
- Density: 62,500 Pixel/m<sup>2</sup>
- Moduel Size: 256mm×128mm
- Cabinet Size: 512mm×512mm×90mm
- Driving Method: 1/16 Scan
- Contrast: 1000:1
- Highlight: **P4 indoor rental led display, SMD2121 rgb led display**

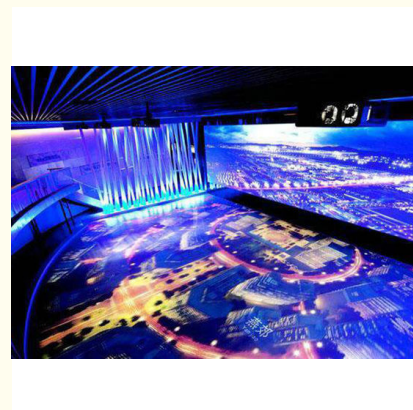

## Product Description

### High Brightness P4 Indoor Rental Led Display Panel Video Wall With Flight Plug Ultra-Thin

#### Product features:

1. Black body LED lamp for high contrast rate;
2. Stable Good quality: we have stable raw materials suppliers such as The lamp; the IC; the power supply; the control system etc. Every step, we have strict quality control;
3. High screen flatness local inaccuracy and seamless connection;
4. P4 HD full color LED video wall for rental;
5. Thin Die-cast aluminum design high precision thickness;
6. Can be hanging, good for rental use;

#### P4 Indoor Full color LED Display Specification

Product Name	Specification
Pixel Pitch	4mm
Pixel Configuration	1R1G1B/SMD2121 Black lamp
Density	62,500 pixel/m <sup>2</sup>
Module Size(L×W)mm	256mm×128mm
Cabinet Size(L×W×H)mm	512mm×512mm×90mm
Module Resolution	64×32
Cabinet Resolution	128×128
Driving Method	1/16 Scan
Driving IC	MBI5124 or FM6124
Brightness	1000cd/
Contrast	1000:01:00
Brightness Adjustment	Auto and Manual
Power Consumption	Max Power: 410W
	Average power: 200W
Cabinet Weight	6.5kg
Color Temperature	2000K—9500K
Horizontal Viewing Angle	140°
Vertical Viewing Angle	140°
Signal Processing	16bit
Grey Processing	1024×1024×1024
	16834×16834×16834
Control Distance	cable100m,Multimode500m,Single mode 2km
Frame Frequency	65 Hz
Refresh Rate	>1920Hz
Control Mode	Synchronous/Asynchronous
The Opposite Calibration Curve	With Eight Optional Gamma Calibration Curve
	Users can choose the recommended curve or adjust it based on actual situation
MTBF	>50000 hours
Life Span	100,000 Hours
Operating Temperature	Working : -20 - 65 °C
	Storage : -40 - 85 °C
Environment Temperature	-30°C to 60°C; humidity Rh10% to 95%
Remote Control	Can realize remote control and send alarm signal to operators in case of logging failure (Be customized)
Self-checking Technique	Self-inspection, communication test, power test, temperature monitoring (Be customized)
Operating System Platform	WindowsNT,Windows2000,WindowsXP,Windows7
Power Supply	AC 110–220V/5V60Hz
Protection Level	IP 45



#### **Our service:**

1. We provide 1-3 years of product quality assurance;
2. Our products are full time of the aging test before the shipped , and quality control to ensure that our product's quality;
3. Reply in a timely manner, and one-time solution to customer problems, to ensure that customers install and use the product ;
4. We can provide our customers with professional steel drawings to install the LED display .

#### **FQA:**

Question 1: what is LED display?

Answer 1: LED full color led display is composed of many LEDs. One pixel is made up of three colors of LEDs, colors of LED can be divided into R.G.B.led display screen can show letters,pictures.video, images and so on;

Question 2: Indoor vs outdoor?

Answer 2: Indoor signs are bright enough to be seen inside a building under commercial lighting, but not bright enough to be seen in direct sunlight. Outdoor signs can be seen in full-on, mid-day sunlight, and are weatherproof to withstand the harsh environmental conditions;

Question 3: What about the lead time?

Answer 3:Order less than 40 square meter led time take 25 working days;

Question 4:Where is it used for?

Answer 4:Outdoor & rental use. Widely used for backdrop of staging event, rental business, live show, concert, etc.



**Shenzhen Weigu Electronic Technology Co., Ltd.**



86-15118043086



Linda@vegooled.com



hdled-display.com

806 Building 1 Geya Technology Building, Clock Base, Ma Tou community, Ma Tian Street, Guangming District ,  
Shenzhen, China