

1R1G1B SMD3528 P7.62 Indoor Full Color Led Panel 17777 Pixel/M2

Our Product Introduction

for more products please visit us on hdled-display.com


Basic Information

- Place of Origin: China
- Brand Name: Vegoo
- Certification: CE/ROHS/FCC/
- Model Number: VG-FD 3
- Minimum Order Quantity: 1 Sq.m
- Packaging Details: Plywood case / Flight case / Carton box
- Delivery Time: 15 working days
- Supply Ability: 3000 Sq.m / month



Product Specification

- Product Name: P7.62 Indoor Full Color LED Display
- Certification: CE/ROHS/FCC
- Pixel Pitch: 7.62mm
- Pixel Configuration: 1R1G1B/SMD3528 White Lamp
- Density: 17,777 Pixel/m2
- Moduel Size(L×W)mm: 244mm×244mm
- Brightness: 1200cd/
- Contrast: 1000:1
- Highlight: full color led display board,
indoor full color led display screen

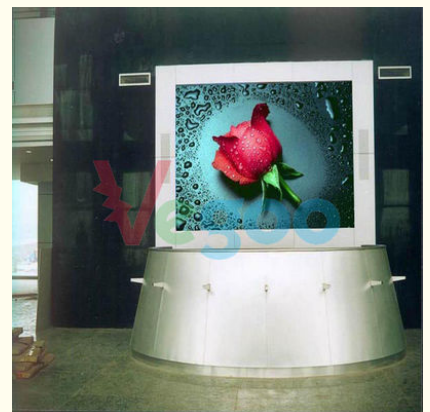

Product Description

Remote Control P7.62 Indoor LED Screen Display 17,777 pixel/m2

Indoor LED Screen Main Features:

- Excellent heat dissipation, noiseless, preference for indoor use;
- Wide viewing angle, adjustable brightness for its vertical of 120 deg;
- Eliminate noise for its noiseless design;
- With working life-span at least 100,000 Hours
- High contrast mask, no dazzle, with better contrast ratio;
- Fast get through input/output signal;
- Seamless connection;
- Support adjustable color temperature within 9500K—11500K

Remote Control

Can realize remote control and send alarm signal to operators in case of logging failure (Be customized)

P7.62 Indoor Full color LED Display Specification:

NO:	Product Name	Specification
1	Pixel Pitch	7.62mm
2	Pixel Configuration	1R1G1B/SMD3528 White lamp
3	Density	17,777 pixel/m2
4	Module Size(L×W)mm	244mm×244mm
5	Cabinet Size(L×W×H)mm	732mm×732mm×90mm
6	Module Resolution	32×32
7	Cabinet Resolution	96×96
8	Driving Method	1/8 Scan
9	Driving IC	MBI5124
10	Brightness	1200cd/
11	Contrast	1000:1
12	Brightness Adjustment	Auto and Manual
13	Power Consumption	Max Power: 650W
14		Average power: 300W
15	Module Weight	0.45kg
16	Color Temperature	9500K—11500K
17	Horizontal Viewing Angle	140°
18	Vertical Viewing Angle	140°
19	Signal Processing	10 or 14bit
20	Grey Processing	1024×1024×1024 16834×16834×16834
21	Control Distance	cable100m, Multimode500m, Single mode 2km
22	Frame Frequency	65 Hz
23	Refresh Rate	>1920Hz
24	Control Mode	Synchronous/Asynchronous
25	The Opposite Calibration Curve	With Eight Optional Gamma Calibration Curve
26		Users can choose the recommended curve or adjust it based on actual situation
27	MTBF	>50000 hours
28	Life Span	100,000 Hours
29	Operating Temperature	Working : -20 - 65 °C
30		Storage : -40 - 85 °C
31	Environment Temperature	-30°C to 60°C; humidity Rh10% to 95%

33	Self-checking Technique	Self-inspection, communication test, power test, temperature monitoring (Be customized)
34	Operating System Platform	WindowsNT,Windows2000,WindowsXP,Windows7
35	Power Supply	AC 110-220V
36	Protection	dustproof, high temperature pervention, anticorrosion, smoulderproof, anti-static, shockproof, lightningproof, smoke alarm and temperature alarm. (Be customized)

Applications:

Stage Background
 Airport Station
 Television Relay
 Plaza
 Square
 Expressway
 Entertainment
 Commercial center

Products exchanged or returned :

we supply our products strictly according to the contract list , if the quantity or specification doesn't meet our contract list, the buyer can give objections within 3 days after received the products , we'll exchanged after company confirmed.

Casual damage situation:

We can provide corresponding fittings without extra fee when improper operation or unexpected artificial damaged arise .

Over Guarantee time :

You only have to pay maintenance cost such as labor costs , spare parts costs and round-trip costs !

Services Before-sale:

Set a special telephone line to resolve the confusion from clients and supply free technology services by telephone.

Consider the demands of clients carefully , study the situation of the installation condition , Team up the related staff and workers promptly , give clients design program details to help them choose the products which they wanted as soon as possible





Shenzhen Weigu Electronic Technology Co., Ltd.



86-15118043086



Linda@vegooled.com



hdled-display.com

806 Building 1 Geya Technology Building, Clock Base, Ma Tou community, Ma Tian Street, Guangming District ,
Shenzhen, China